


ALUMINUM ELECTROLYTIC CAPACITORS · SNAP-IN TYPE

CD 294 BW SERIES

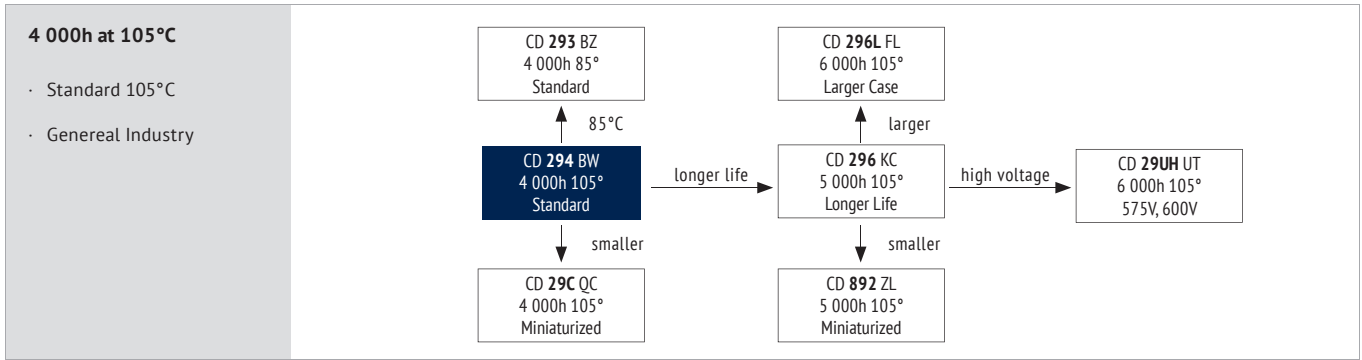

ITEM CHARACTERISTICS

Operating Temperature Range (°C)	-40 ~ +105	-25 ~ +105
Voltage Range (V)	16 ~ 100	160 ~ 550
Capacitance Range (µF)	39 ~ 47 000	
Capacitance Tolerance (20°C, 120Hz)	± 20%	

! The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current: After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	16 ~ 100	160 ~ 200	250 ~ 550
	$Z_{-25°C} / Z_{+20°C}$	4		
	$Z_{-40°C} / Z_{+20°C}$	15	-	

Fast Charge-Discharge: **!** Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray


ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	4 000h	> 180 000h	2 000h	3 000h	1 000h	
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 20% of initial value	Within ± 20% of initial value	
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 200% of specified value	Not more than 200% of specified value	
Condition:						
Applied Voltage	U_R	U_R	U_R	U_R	$U_R = 0$	After test: U_R to be applied for 30 min > 24h before measurement
Applied Current	I_R	$1,4 \times I_R$	I_R	$I_R = 0$	$I_R = 0$	
Applied Temperature	105°C	40°C	105°C	105°C	105°C	
				IEC 60384		

MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz	≥ 50 kHz
Rated Voltage (V)						
≤ 100	0,95	1,00	1,07	1,13	1,19	1,20
160 ~ 250	0,87	1,00	1,17	1,32	1,45	1,50
≥ 315	0,80	1,00	1,16	1,30	1,41	1,43

Multipliers for typical operating conditions.

MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)

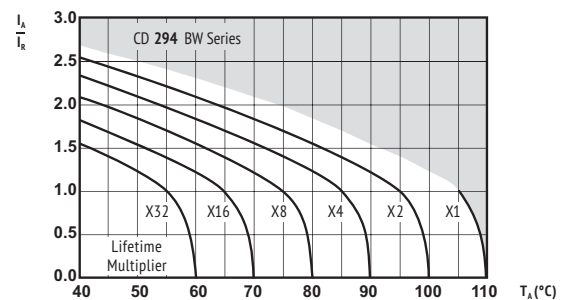

I_A = actual ripple current at 120Hz,
 I_R = rated ripple current at 120Hz, 105°C
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

! Max. Current Snap-In Terminal: 15A. For more current use Lug-Terminals.

ENVIRONMENTAL

The products are RoHS, WEEE and RECh compliant. The detailed version please see separate "Environmental Certificates" document or www.jianghai-europe.com

! SAFETY FACTOR

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.

U _{RDC} (Surge Voltage) Code	C _R Rated Capacitance	ESR _{max} Equivalent Series Resistance 20°C 120Hz	ESR _{typ} Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I _{leak} Leakage Current	I _{RAC} Rated Ripple Current 105°C 120Hz	Size øD x L	ORDER CODE ◇ = pin style & length △ = pin number
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	Details: Page 6
16 (20) 1C	6 800	98	68	0,50	1,1	1,60	22 x 25	ECS1CBW682M◇◇△2225
	10 000	67	46	0,50	1,5	1,99	22 x 30	ECS1CBW103M◇◇△2230
		67	46	0,50	1,5	1,99	25 x 25	ECS1CBW103M◇◇△2525
	12 000	56	39	0,50	1,5	2,28	22 x 35	ECS1CBW123M◇◇△2235
		56	39	0,50	1,5	2,30	25 x 30	ECS1CBW123M◇◇△2530
	15 000	56	39	0,50	1,5	2,38	30 x 25	ECS1CBW123M◇◇△3025
		45	31	0,50	1,5	2,64	22 x 40	ECS1CBW153M◇◇△2240
	18 000	45	31	0,50	1,5	2,68	25 x 35	ECS1CBW153M◇◇△2535
		37	26	0,50	1,5	2,98	22 x 45	ECS1CBW183M◇◇△2245
	22 000	37	26	0,50	1,5	3,04	25 x 40	ECS1CBW183M◇◇△2540
		37	26	0,50	1,5	3,00	30 x 30	ECS1CBW183M◇◇△3030
	27 000	37	26	0,50	1,5	3,10	35 x 25	ECS1CBW183M◇◇△3525
		31	21	0,50	1,5	3,40	25 x 45	ECS1CBW223M◇◇△2545
	33 000	31	21	0,50	1,5	3,39	30 x 35	ECS1CBW223M◇◇△3035
		25	17	0,50	1,5	3,81	25 x 50	ECS1CBW273M◇◇△2550
	39 000	25	17	0,50	1,5	3,74	35 x 30	ECS1CBW273M◇◇△3530
		21	14	0,50	1,5	4,30	30 x 45	ECS1CBW333M◇◇△3045
	47 000	21	14	0,50	1,5	4,24	35 x 35	ECS1CBW333M◇◇△3535
		18	12	0,50	1,5	4,74	30 x 50	ECS1CBW393M◇◇△3050
		18	12	0,50	1,5	4,72	35 x 40	ECS1CBW393M◇◇△3540
15		10	0,50	1,5	5,27	35 x 45	ECS1CBW473M◇◇△3545	

U _{RDC} (Surge Voltage) Code	C _R Rated Capacitance	ESR _{max} Equivalent Series Resistance 20°C 120Hz	ESR _{typ} Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I _{leak} Leakage Current	I _{RAC} Rated Ripple Current 105°C 120Hz	Size øD x L	ORDER CODE ◇ = pin style & length △ = pin number
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	Details: Page 6
25 (32) 1E	4 700	113	79	0,40	1,2	1,55	22 x 25	ECS1EBW472M◇◇△2225
	6 800	79	55	0,40	1,5	1,91	22 x 30	ECS1EBW682M◇◇△2230
		79	55	0,40	1,5	1,91	25 x 25	ECS1EBW682M◇◇△2525
	8 200	65	45	0,40	1,5	2,14	22 x 35	ECS1EBW822M◇◇△2235
		65	45	0,40	1,5	2,16	25 x 30	ECS1EBW822M◇◇△2530
	10 000	65	45	0,40	1,5	2,25	30 x 25	ECS1EBW822M◇◇△3025
		54	37	0,40	1,5	2,40	22 x 40	ECS1EBW103M◇◇△2240
	12 000	54	37	0,40	1,5	2,44	25 x 35	ECS1EBW103M◇◇△2535
		45	31	0,40	1,5	2,69	22 x 45	ECS1EBW123M◇◇△2245
	15 000	45	31	0,40	1,5	2,74	25 x 40	ECS1EBW123M◇◇△2540
		45	31	0,40	1,5	2,70	30 x 30	ECS1EBW123M◇◇△3030
	18 000	45	31	0,40	1,5	2,80	35 x 25	ECS1EBW123M◇◇△3525
		36	25	0,40	1,5	3,15	25 x 45	ECS1EBW153M◇◇△2545
	22 000	36	25	0,40	1,5	3,13	30 x 35	ECS1EBW153M◇◇△3035
		36	25	0,40	1,5	3,22	35 x 30	ECS1EBW153M◇◇△3530
	27 000	30	21	0,40	1,5	3,54	25 x 50	ECS1EBW183M◇◇△2550
		30	21	0,40	1,5	3,54	30 x 40	ECS1EBW183M◇◇△3040
	33 000	25	17	0,40	1,5	4,24	30 x 45	ECS1EBW223M◇◇△3045
		25	17	0,40	1,5	3,96	35 x 35	ECS1EBW223M◇◇△3535
		20	14	0,40	1,5	4,75	35 x 45	ECS1EBW273M◇◇△3545
17		11	0,40	1,5	5,39	35 x 50	ECS1EBW333M◇◇△3550	

U _{RDC} (Surge Voltage) Code	C _R Rated Capacitance	ESR _{max} Equivalent Series Resistance 20°C 120Hz	ESR _{typ} Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I _{leak} Leakage Current	I _{RAC} Rated Ripple Current 105°C 120Hz	Size øD x L	ORDER CODE ◇ = pin style & length △ = pin number
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	Details: Page 6
35 (44) 1V	3 300	141	99	0,35	1,2	1,43	22 x 25	ECS1VBW332M◇◇△2225
	3 900	120	83	0,35	1,4	1,65	22 x 30	ECS1VBW392M◇◇△2230
		120	83	0,35	1,4	1,65	25 x 25	ECS1VBW392M◇◇△2525
	4 700	99	69	0,35	1,5	1,78	22 x 35	ECS1VBW472M◇◇△2235
		83	58	0,35	1,5	2,02	25 x 30	ECS1VBW472M◇◇△2530
	5 600	83	58	0,35	1,5	2,04	30 x 25	ECS1VBW472M◇◇△3025
		83	58	0,35	1,5	2,12	30 x 25	ECS1VBW562M◇◇△3025
	6 800	69	48	0,35	1,5	2,28	22 x 40	ECS1VBW682M◇◇△2240
		69	48	0,35	1,5	2,31	25 x 35	ECS1VBW682M◇◇△2535
	8 200	57	40	0,35	1,5	2,67	22 x 50	ECS1VBW822M◇◇△2250
		57	40	0,35	1,5	2,60	25 x 40	ECS1VBW822M◇◇△2540
	10 000	57	40	0,35	1,5	2,56	30 x 30	ECS1VBW822M◇◇△3030
		57	40	0,35	1,5	2,78	35 x 25	ECS1VBW822M◇◇△3525
	12 000	47	33	0,35	1,5	2,92	25 x 45	ECS1VBW103M◇◇△2545
		47	33	0,35	1,5	2,92	30 x 35	ECS1VBW103M◇◇△3035
	15 000	39	27	0,35	1,5	3,26	25 x 50	ECS1VBW123M◇◇△2550
		39	27	0,35	1,5	3,28	30 x 40	ECS1VBW123M◇◇△3040
	18 000	39	27	0,35	1,5	3,20	35 x 30	ECS1VBW123M◇◇△3530
		31	22	0,35	1,5	3,74	30 x 45	ECS1VBW153M◇◇△3045
	22 000	31	22	0,35	1,5	3,69	35 x 35	ECS1VBW153M◇◇△3535
26		18	0,35	1,5	4,16	35 x 40	ECS1VBW183M◇◇△3540	
	22	15	0,35	1,5	4,92	35 x 50	ECS1VBW223M◇◇△3550	

U _{RDC} (Surge Voltage) Code	C _R Rated Capacitance	ESR _{max} Equivalent Series Resistance 20°C 120Hz	ESR _{typ} Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I _{leak} Leakage Current	I _{RAC} Rated Ripple Current 105°C 120Hz	Size øD x L	ORDER CODE ◇ = pin style & length △ = pin number
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	Details: Page 6
50 (63) 1H	1 800	222	155	0,30	0,9	1,31	22 x 25	ECS1HBW182M◇◇△2225
	2 200	181	127	0,30	1,1	1,45	22 x 30	ECS1HBW222M◇◇△2230
		181	127	0,30	1,1	1,45	22 x 30	ECS1HBW222M◇◇△2530
	2 700	148	103	0,30	1,4	1,70	22 x 30	ECS1HBW272M◇◇△2230
		148	103	0,30	1,4	1,70	25 x 25	ECS1HBW272M◇◇△2525
	3 300	121	84	0,30	1,5	1,98	22 x 35	ECS1HBW332M◇◇△2235
		121	84	0,30	1,5	2,00	25 x 30	ECS1HBW332M◇◇△2530
	3 900	103	72	0,30	1,5	2,25	22 x 40	ECS1HBW392M◇◇△2240
		103	72	0,30	1,5	2,28	25 x 35	ECS1HBW392M◇◇△2535
	4 700	103	72	0,30	1,5	2,22	30 x 25	ECS1HBW392M◇◇△3025
		85	59	0,30	1,5	2,56	22 x 45	ECS1HBW472M◇◇△2245
	5 600	85	59	0,30	1,5	2,58	30 x 30	ECS1HBW472M◇◇△3030
		85	59	0,30	1,5	2,67	35 x 25	ECS1HBW472M◇◇△3525
	6 800	72	50	0,30	1,5	2,89	22 x 50	ECS1HBW562M◇◇△2250
		72	50	0,30	1,5	2,81	25 x 40	ECS1HBW562M◇◇△2540
	8 200	72	50	0,30	1,5	2,95	30 x 35	ECS1HBW562M◇◇△3035
		59	41	0,30	1,5	3,37	25 x 50	ECS1HBW682M◇◇△2550
	10 000	59	41	0,30	1,5	3,39	30 x 40	ECS1HBW682M◇◇△3040
		59	41	0,30	1,5	3,31	35 x 30	ECS1HBW682M◇◇△3530
	12 000	49	34	0,30	1,5	3,71	30 x 45	ECS1HBW822M◇◇△3045
49		34	0,30	1,5	3,66	35 x 35	ECS1HBW822M◇◇△3535	
	40	28	0,30	1,5	4,09	30 x 50	ECS1HBW103M◇◇△3050	
	40	28	0,30	1,5	4,07	35 x 40	ECS1HBW103M◇◇△3540	
	34	23	0,30	1,5	4,50	35 x 45	ECS1HBW123M◇◇△3545	

U _{RDC} (Surge Voltage) Code	C _R Rated Capacitance	ESR _{max} Equivalent Series Resistance 20°C 120Hz	ESR _{typ} Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I _{leak} Leakage Current	I _{RAC} Rated Ripple Current 105°C 120Hz	Size øD x L	ORDER CODE ◇ = pin style & length △ = pin number
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	Details: Page 6
63 (79) 1J	1 200	222	155	0,20	0,8	1,25	22 x 25	ECS1JBW122M◇◇△2225
	1 800	148	103	0,20	1,1	1,52	22 x 30	ECS1JBW182M◇◇△2230
		148	103	0,20	1,1	1,52	25 x 25	ECS1JBW182M◇◇△2525
	2 200	121	84	0,20	1,4	1,73	22 x 35	ECS1JBW222M◇◇△2235
		121	84	0,20	1,4	1,75	25 x 30	ECS1JBW222M◇◇△2530
	2 700	99	69	0,20	1,5	1,97	22 x 40	ECS1JBW272M◇◇△2240
		99	69	0,20	1,5	1,99	25 x 35	ECS1JBW272M◇◇△2535
	3 300	99	69	0,20	1,5	1,93	30 x 25	ECS1JBW272M◇◇△3025
		81	56	0,20	1,5	2,32	22 x 50	ECS1JBW332M◇◇△2250
	3 900	81	56	0,20	1,5	2,27	25 x 40	ECS1JBW332M◇◇△2540
		81	56	0,20	1,5	2,24	30 x 30	ECS1JBW332M◇◇△3030
	4 700	81	56	0,20	1,5	2,41	35 x 25	ECS1JBW332M◇◇△3525
		69	48	0,20	1,5	2,54	25 x 45	ECS1JBW392M◇◇△2545
	5 600	69	48	0,20	1,5	2,55	30 x 35	ECS1JBW392M◇◇△3035
		57	40	0,20	1,5	2,88	25 x 50	ECS1JBW472M◇◇△2550
	6 800	57	40	0,20	1,5	2,90	30 x 40	ECS1JBW472M◇◇△3040
		57	40	0,20	1,5	2,83	35 x 30	ECS1JBW472M◇◇△3530
	8 200	48	33	0,20	1,5	3,28	30 x 45	ECS1JBW562M◇◇△3045
		48	33	0,20	1,5	3,24	35 x 35	ECS1JBW562M◇◇△3535
	10 000	40	27	0,20	1,5	3,73	30 x 50	ECS1JBW682M◇◇△3050
40		27	0,20	1,5	3,71	35 x 40	ECS1JBW682M◇◇△3540	
	33	23	0,20	1,5	4,16	35 x 45	ECS1JBW822M◇◇△3545	
	27	19	0,20	1,5	4,69	35 x 50	ECS1JBW103M◇◇△3550	

U _{RDC} (Surge Voltage) Code	C _R Rated
---	-------------------------



U _{RDC} (Surge Voltage) Code	C _R Rated Capacitance (µF)	ESR _{max} Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR _{typ} Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I _{leak} Leakage Current (mA)	I _{RAC} Rated Ripple Current 105°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 6
80 (100) 1K	3 900	69	48	0,20	1,5	3,12	30 x 45	ECS1KBW392M◇◇△△3045
		69	48	0,20	1,5	3,07	35 x 35	ECS1KBW392M◇◇△△3535
	4 700	57	40	0,20	1,5	3,56	30 x 50	ECS1KBW472M◇◇△△3050
		57	40	0,20	1,5	3,50	35 x 40	ECS1KBW472M◇◇△△3540
	5 600	48	33	0,20	1,5	3,87	35 x 45	ECS1KBW562M◇◇△△3545
	6 800	40	27	0,20	1,5	4,19	35 x 50	ECS1KBW682M◇◇△△3550

U _{RDC} (Surge Voltage) Code	C _R Rated Capacitance (µF)	ESR _{max} Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR _{typ} Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I _{leak} Leakage Current (mA)	I _{RAC} Rated Ripple Current 105°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 6
100 (125) 2A	560	474	332	0,20	0,6	1,07	22 x 25	ECS2ABW561M◇◇△△2225
	820	324	227	0,20	0,8	1,35	22 x 30	ECS2ABW821M◇◇△△2230
820	324	227	0,20	0,8	1,35	25 x 25	ECS2ABW821M◇◇△△2525	
	266	186	0,20	1,0	1,54	22 x 35	ECS2ABW102M◇◇△△2235	
1 000	266	186	0,20	1,0	1,56	25 x 30	ECS2ABW102M◇◇△△2530	
	221	155	0,20	1,2	1,74	22 x 40	ECS2ABW122M◇◇△△2240	
1 200	222	155	0,20	1,2	1,76	25 x 35	ECS2ABW122M◇◇△△2535	
	222	155	0,20	1,2	1,71	30 x 25	ECS2ABW122M◇◇△△3025	
1 500	177	124	0,20	1,5	1,99	22 x 45	ECS2ABW152M◇◇△△2245	
	177	124	0,20	1,5	2,03	25 x 40	ECS2ABW152M◇◇△△2540	
	177	124	0,20	1,5	2,00	30 x 30	ECS2ABW152M◇◇△△3030	
1 800	177	124	0,20	1,5	2,07	35 x 25	ECS2ABW152M◇◇△△3525	
	148	103	0,20	1,5	2,28	25 x 45	ECS2ABW182M◇◇△△2545	
	148	103	0,20	1,5	2,27	30 x 35	ECS2ABW182M◇◇△△3035	
2 200	121	84	0,20	1,5	2,57	25 x 50	ECS2ABW222M◇◇△△2550	
	121	84	0,20	1,5	2,59	30 x 40	ECS2ABW222M◇◇△△3040	
	121	84	0,20	1,5	2,52	35 x 30	ECS2ABW222M◇◇△△3530	
2 700	99	69	0,20	1,5	2,94	30 x 45	ECS2ABW272M◇◇△△3045	
	99	69	0,20	1,5	2,90	35 x 35	ECS2ABW272M◇◇△△3535	
3 300	81	56	0,20	1,5	3,32	30 x 50	ECS2ABW332M◇◇△△3050	
	81	56	0,20	1,5	3,31	35 x 40	ECS2ABW332M◇◇△△3540	
3 900	69	48	0,20	1,5	3,69	35 x 45	ECS2ABW392M◇◇△△3545	
	57	40	0,20	1,5	4,14	35 x 50	ECS2ABW472M◇◇△△3550	

U _{RDC} (Surge Voltage) Code	C _R Rated Capacitance (µF)	ESR _{max} Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR _{typ} Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I _{leak} Leakage Current (mA)	I _{RAC} Rated Ripple Current 105°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 6
160 (200) 2C	330	603	422	0,15	0,5	1,16	22 x 25	ECS2CBW331M◇◇△△2225
	390	511	357	0,15	0,6	1,43	22 x 30	ECS2CBW391M◇◇△△2230
470	424	296	0,15	0,8	1,52	22 x 35	ECS2CBW471M◇◇△△2235	
	424	296	0,15	0,8	1,55	25 x 25	ECS2CBW471M◇◇△△2525	
560	356	249	0,15	0,9	1,62	22 x 40	ECS2CBW561M◇◇△△2240	
	356	249	0,15	0,9	1,73	25 x 30	ECS2CBW561M◇◇△△2530	
680	293	205	0,15	1,1	1,70	22 x 45	ECS2CBW681M◇◇△△2245	
	293	205	0,15	1,1	1,81	25 x 35	ECS2CBW681M◇◇△△2535	
	293	205	0,15	1,1	1,82	30 x 25	ECS2CBW681M◇◇△△3025	
820	243	170	0,15	1,3	1,81	22 x 50	ECS2CBW821M◇◇△△2250	
	243	170	0,15	1,3	1,98	25 x 40	ECS2CBW821M◇◇△△2540	
	243	170	0,15	1,3	1,98	30 x 30	ECS2CBW821M◇◇△△3030	
1 000	243	170	0,15	1,3	1,93	35 x 25	ECS2CBW821M◇◇△△3525	
	199	139	0,15	1,5	2,04	25 x 45	ECS2CBW102M◇◇△△2545	
	199	139	0,15	1,5	2,14	30 x 35	ECS2CBW102M◇◇△△3035	
1 200	166	116	0,15	1,5	2,12	25 x 50	ECS2CBW122M◇◇△△2550	
	166	116	0,15	1,5	2,22	30 x 40	ECS2CBW122M◇◇△△3040	
1 500	166	116	0,15	1,5	2,40	35 x 30	ECS2CBW122M◇◇△△3530	
	133	93	0,15	1,5	2,46	30 x 45	ECS2CBW152M◇◇△△3045	
1 800	133	93	0,15	1,5	2,53	35 x 35	ECS2CBW152M◇◇△△3535	
	111	77	0,15	1,5	2,98	35 x 45	ECS2CBW182M◇◇△△3545	
2 200	91	63	0,15	1,5	3,10	35 x 50	ECS2CBW222M◇◇△△3550	
2 700	74	51	0,15	1,5	3,77	35 x 55	ECS2CBW272M◇◇△△3555	
3 300	61	42	0,15	1,5	4,33	35 x 60	ECS2CBW332M◇◇△△3560	

U _{RDC} (Surge Voltage) Code	C _R Rated Capacitance (µF)	ESR _{max} Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR _{typ} Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I _{leak} Leakage Current (mA)	I _{RAC} Rated Ripple Current 105°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 6
200 (250) 2D	220	905	633	0,15	0,4	1,08	22 x 25	ECS2DBW221M◇◇△△2225
	270	737	516	0,15	0,5	1,20	22 x 30	ECS2DBW271M◇◇△△2230
330	603	422	0,15	0,7	1,30	22 x 30	ECS2DBW331M◇◇△△2230	
	603	422	0,15	0,7	1,35	25 x 25	ECS2DBW331M◇◇△△2525	
390	511	357	0,15	0,8	1,41	22 x 35	ECS2DBW391M◇◇△△2235	
	424	296	0,15	0,9	1,50	22 x 40	ECS2DBW471M◇◇△△2240	
470	424	296	0,15	0,9	1,47	25 x 30	ECS2DBW471M◇◇△△2530	
	424	296	0,15	0,9	1,56	30 x 25	ECS2DBW471M◇◇△△3025	
560	356	249	0,15	1,1	1,58	22 x 45	ECS2DBW561M◇◇△△2245	
	356	249	0,15	1,1	1,65	25 x 35	ECS2DBW561M◇◇△△2535	
680	293	205	0,15	1,4	1,68	22 x 50	ECS2DBW681M◇◇△△2250	
	293	205	0,15	1,4	1,80	25 x 40	ECS2DBW681M◇◇△△2540	
	293	205	0,15	1,4	1,82	30 x 30	ECS2DBW681M◇◇△△3030	
	293	205	0,15	1,4	1,96	35 x 25	ECS2DBW681M◇◇△△3525	

U _{RDC} (Surge Voltage) Code	C _R Rated Capacitance (µF)	ESR _{max} Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR _{typ} Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I _{leak} Leakage Current (mA)	I _{RAC} Rated Ripple Current 105°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 6
200 (250) 2D	820	243	170	0,15	1,5	1,87	25 x 50	ECS2DBW821M◇◇△△2550
		243	170	0,15	1,5	1,99	30 x 35	ECS2DBW821M◇◇△△3035
1 000	1 000	243	170	0,15	1,5	2,07	35 x 30	ECS2DBW821M◇◇△△3530
		199	139	0,15	1,5	2,17	30 x 45	ECS2DBW102M◇◇△△3045
1 200	1 200	199	139	0,15	1,5	2,22	35 x 35	ECS2DBW102M◇◇△△3535
		166	116	0,15	1,5	2,22	30 x 50	ECS2DBW122M◇◇△△3050
1 500	1 500	166	116	0,15	1,5	2,42	35 x 40	ECS2DBW122M◇◇△△3540
		133	93	0,15	1,5	2,59	35 x 45	ECS2DBW152M◇◇△△3545
1 800	111	77	0,15	1,5	2,70	35 x 50	ECS2DBW182M◇◇△△3550	
2 200	91	63	0,15	1,5	3,23	35 x 60	ECS2DBW222M◇◇△△3560	

U _{RDC} (Surge Voltage) Code	C _R Rated Capacitance (µF)	ESR _{max} Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR _{typ} Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I _{leak} Leakage Current (mA)	I _{RAC} Rated Ripple Current 105°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 6
250 (300) 2E	180	1 106	774	0,15	0,5	0,94	22 x 25	ECS2EBW181M◇◇△△2225
		905	633	0,15	0,6	1,10	22 x 30	ECS2EBW221M◇◇△△2230
220	220	905	633	0,15	0,6	1,15	25 x 25	ECS2EBW221M◇◇△△2525
		737	516	0,15	0,7	1,13	22 x 35	ECS2EBW271M◇◇△△2235
330	330	603	422	0,15	0,8	1,20	22 x 40	ECS2EBW331M◇◇△△2240
		603	422	0,15	0,8	1,30	25 x 30	ECS2EBW331M◇◇△△2530
390	390	603	422	0,15	0,8	1,35	30 x 25	ECS2EBW331M◇◇△△3025
		511	357	0,15	1,0	1,26	22 x 45	ECS2EBW391M◇◇△△2245
470	470	511	357	0,15	1,0	1,41	25 x 35	ECS2EBW391M◇◇△△2535
		424	296	0,15	1,2	1,37	22 x 50	ECS2EBW471M◇◇△△2250
560	560	424	296	0,15	1,2	1,52	25 x 40	ECS2EBW471M◇◇△△2540
		424	296	0,15	1,2	1,36	30 x 30	ECS2EBW471M◇◇△△3030
680	680	424	296	0,15	1,2	1,40	35 x 25	ECS2EBW471M◇◇△△3525
		356	249	0,15	1,4	1,59	25 x 45	ECS2EBW561M◇◇△△2545
820	820	356	249	0,15	1,4	1,57	30 x 35	ECS2EBW561M◇◇△△3035
		356	249	0,15	1,4	1,56	35 x 30	ECS2EBW561M◇◇△△3530
1 000	1 000	293	205	0,15	1,5	1,66	25 x 50	ECS2EBW681M◇◇△△2550
		293	205	0,15	1,5	1,76	30 x 40	ECS2EBW681M◇◇△△3040
1 200	1 200	243	170	0,15	1,5	1,83	30 x 45	ECS2EBW821M◇◇△△3045
		243	170	0,15	1,5	1,82	35 x 35	ECS2EBW821M◇◇△△3535
1 500	1 500	199	139	0,15	1,5	1,87	30 x 50	ECS2EBW102M◇◇△△3050
		199	139	0,15	1,5	1,99	35 x 40	ECS2EBW102M◇◇△△3540
1 800	166	116	0,15	1,5	2,10	35 x 45	ECS2EBW122M◇◇△△3545	
1 500	133	93	0,15	1,5	2,70	35 x 50	ECS2EBW152M◇◇△△3550	
1 800	111	77	0,15	1,5	2,92	35 x 60	ECS2EBW182M◇◇△△3560	

U _{RDC} (Surge Voltage) Code	C _R Rated Capacitance (µF)	ESR _{max} Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR _{typ} Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I _{leak} Leakage Current (mA)	I _{RAC} Rated Ripple Current 105°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 6
315 (365) 2F	100	1 990	1 095	0,				

U _{RDC} (Surge Voltage) Code	C _R Rated Capacitance	ESR _{max} Equivalent Series Resistance 20°C 120Hz	ESR _{typ} Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I _{leak} Leakage Current	I _{RAC} Rated Ripple Current 105°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 6
(V)	(μF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
350 (400) 2V	180	1 106	608	0,15	0,6	0,81	22 x 45	ECS2VBW181M◇◇△△2245
		1 106	608	0,15	0,6	0,89	25 x 35	ECS2VBW181M◇◇△△2535
		1 106	608	0,15	0,6	0,90	30 x 30	ECS2VBW181M◇◇△△3030
	220	905	498	0,15	0,8	0,93	22 x 50	ECS2VBW221M◇◇△△2250
		905	498	0,15	0,8	0,97	25 x 40	ECS2VBW221M◇◇△△2540
		905	498	0,15	0,8	0,98	35 x 25	ECS2VBW221M◇◇△△3525
	270	737	406	0,15	0,9	1,01	25 x 50	ECS2VBW271M◇◇△△2550
		737	406	0,15	0,9	1,05	30 x 35	ECS2VBW271M◇◇△△3035
		737	406	0,15	0,9	1,01	35 x 30	ECS2VBW271M◇◇△△3530
	330	603	332	0,15	1,2	1,16	30 x 45	ECS2VBW331M◇◇△△3045
		603	332	0,15	1,2	1,16	35 x 35	ECS2VBW331M◇◇△△3535
		511	281	0,15	1,4	1,26	30 x 50	ECS2VBW391M◇◇△△3050
	390	511	281	0,15	1,4	1,26	35 x 40	ECS2VBW391M◇◇△△3540
		424	233	0,15	1,5	1,35	35 x 45	ECS2VBW471M◇◇△△3545
		424	233	0,15	1,5	1,35	35 x 45	ECS2VBW471M◇◇△△3545
	470	560	196	0,15	1,5	1,51	35 x 50	ECS2VBW561M◇◇△△3550
680		293	0,15	1,5	1,92	35 x 55	ECS2VBW681M◇◇△△3555	
820		243	0,15	1,5	2,25	35 x 60	ECS2VBW821M◇◇△△3560	
1 000	199	139	0,15	1,5	2,50	35 x 60	ECS2VBW102M◇◇△△3560	

U _{RDC} (Surge Voltage) Code	C _R Rated Capacitance	ESR _{max} Equivalent Series Resistance 20°C 120Hz	ESR _{typ} Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I _{leak} Leakage Current	I _{RAC} Rated Ripple Current 105°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 6
(V)	(μF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
400 (450) 2G	68	2 926	1 522	0,15	0,3	0,47	22 x 25	ECS2GBW680M◇◇△△2225
		2 427	1 262	0,15	0,3	0,56	22 x 25	ECS2GBW820M◇◇△△2225
	82	1 990	1 035	0,15	0,4	0,60	22 x 30	ECS2GBW101M◇◇△△2230
		1 658	863	0,15	0,5	0,64	22 x 35	ECS2GBW121M◇◇△△2235
	120	1 658	863	0,15	0,5	0,70	25 x 25	ECS2GBW121M◇◇△△2525
		1 327	690	0,15	0,6	0,70	22 x 40	ECS2GBW151M◇◇△△2240
	150	1 327	690	0,15	0,6	0,73	25 x 30	ECS2GBW151M◇◇△△2530
		1 106	575	0,15	0,7	0,78	22 x 45	ECS2GBW181M◇◇△△2245
	180	1 106	575	0,15	0,7	0,82	25 x 35	ECS2GBW181M◇◇△△2535
		905	471	0,15	0,9	0,87	25 x 40	ECS2GBW221M◇◇△△2540
	220	905	471	0,15	0,9	0,86	30 x 30	ECS2GBW221M◇◇△△3030
		737	383	0,15	1,1	0,94	25 x 45	ECS2GBW271M◇◇△△2545
	270	737	383	0,15	1,1	0,95	30 x 35	ECS2GBW271M◇◇△△3035
		603	314	0,15	1,3	1,11	30 x 40	ECS2GBW331M◇◇△△3040
	330	603	314	0,15	1,3	1,13	35 x 30	ECS2GBW331M◇◇△△3530
		511	265	0,15	1,5	1,15	30 x 45	ECS2GBW391M◇◇△△3045
390	511	265	0,15	1,5	1,26	35 x 35	ECS2GBW391M◇◇△△3535	
	424	220	0,15	1,5	1,31	35 x 40	ECS2GBW471M◇◇△△3540	
470	560	185	0,15	1,5	1,50	35 x 45	ECS2GBW561M◇◇△△3545	
	680	293	0,15	1,5	1,90	35 x 50	ECS2GBW681M◇◇△△3550	
820	243	126	0,15	1,5	2,20	35 x 60	ECS2GBW821M◇◇△△3560	
	243	126	0,15	1,5	2,20	40 x 50	ECS2GBW821M◇◇△△4050	
1 000	199	139	0,15	1,5	2,60	35 x 65	ECS2GBW102M◇◇△△3565	

U _{RDC} (Surge Voltage) Code	C _R Rated Capacitance	ESR _{max} Equivalent Series Resistance 20°C 120Hz	ESR _{typ} Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I _{leak} Leakage Current	I _{RAC} Rated Ripple Current 105°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 6
(V)	(μF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
420 (470) 2X	68	3 901	1 951	0,20	0,3	0,50	22 x 25	ECS2XBW680M◇◇△△2225
		3 235	1 618	0,20	0,3	0,60	22 x 30	ECS2XBW820M◇◇△△2230
	82	2 653	1 327	0,20	0,4	0,65	22 x 35	ECS2XBW101M◇◇△△2235
		2 211	1 106	0,20	0,5	0,70	22 x 40	ECS2XBW121M◇◇△△2240
	120	2 211	1 106	0,20	0,5	0,72	25 x 30	ECS2XBW121M◇◇△△2530
		1 769	885	0,20	0,6	0,75	22 x 45	ECS2XBW151M◇◇△△2245
	150	1 769	885	0,20	0,6	0,80	25 x 35	ECS2XBW151M◇◇△△2535
		1 474	737	0,20	0,8	0,85	25 x 40	ECS2XBW181M◇◇△△2540
	180	1 474	737	0,20	0,8	0,85	30 x 30	ECS2XBW181M◇◇△△3030
		1 206	603	0,20	0,9	0,90	25 x 45	ECS2XBW221M◇◇△△2545
	220	1 206	603	0,20	0,9	0,96	30 x 35	ECS2XBW221M◇◇△△3035
		983	492	0,20	1,1	1,05	25 x 50	ECS2XBW271M◇◇△△2550
	270	983	492	0,20	1,1	1,06	30 x 40	ECS2XBW271M◇◇△△3040
		804	402	0,20	1,4	1,14	30 x 45	ECS2XBW331M◇◇△△3045
	330	804	402	0,20	1,4	1,20	35 x 35	ECS2XBW331M◇◇△△3535
		681	340	0,20	1,5	1,25	30 x 50	ECS2XBW391M◇◇△△3050
390	681	340	0,20	1,5	1,26	35 x 40	ECS2XBW391M◇◇△△3540	
	565	282	0,20	1,5	1,31	35 x 45	ECS2XBW471M◇◇△△3545	
470	565	282	0,20	1,5	1,50	35 x 50	ECS2XBW561M◇◇△△3550	
560	474	237	0,20	1,5	1,50	35 x 50	ECS2XBW561M◇◇△△3550	
680	391	196	0,20	1,5	1,90	35 x 55	ECS2XBW681M◇◇△△3555	
820	324	162	0,20	1,5	2,20	35 x 60	ECS2XBW821M◇◇△△3560	

U _{RDC} (Surge Voltage) Code	C _R Rated Capacitance	ESR _{max} Equivalent Series Resistance 20°C 120Hz	ESR _{typ} Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I _{leak} Leakage Current	I _{RAC} Rated Ripple Current 105°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 6
(V)	(μF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
450 (500) 2W	56	4 737	2 370	0,20	0,3	0,47	22 x 25	ECS2WBW560M◇◇△△2225
		3 901	1 951	0,20	0,3	0,56	22 x 30	ECS2WBW680M◇◇△△2230
	68	3 901	1 951	0,20	0,3	0,56	25 x 25	ECS2WBW680M◇◇△△2525
		82	3 235	1 618	0,20	0,4	0,65	22 x 35
	100	2 653	1 327	0,20	0,5	0,70	22 x 40	ECS2WBW101M◇◇△△2240
		2 653	1 327	0,20	0,5	0,70	25 x 30	ECS2WBW101M◇◇△△2530
	120	2 211	1 106	0,20	0,5	0,73	22 x 45	ECS2WBW121M◇◇△△2245
		2 211	1 106	0,20	0,5	0,73	25 x 35	ECS2WBW121M◇◇△△2535
	150	1 769	885	0,20	0,7	0,78	22 x 50	ECS2WBW151M◇◇△△2250
		1 769	885	0,20	0,7	0,82	25 x 40	ECS2WBW151M◇◇△△2540
	180	1 769	885	0,20	0,7	0,83	30 x 30	ECS2WBW151M◇◇△△3030
		1 474	737	0,20	0,8	0,87	25 x 45	ECS2WBW181M◇◇△△2545
	220	1 474	737	0,20	0,8	0,86	30 x 35	ECS2WBW181M◇◇△△3035
		1 206	603	0,20	1,0	0,94	25 x 50	ECS2WBW221M◇◇△△2550
	270	1 206	603	0,20	1,0	0,95	30 x 40	ECS2WBW221M◇◇△△3040
		1 206	603	0,20	1,0	0,91	35 x 30	ECS2WBW221M◇◇△△3530
330	983	492	0,20	1,2	1,11	30 x 45	ECS2WBW271M◇◇△△3045	
	983	492	0,20	1,2	1,13	35 x 35	ECS2WBW271M◇◇△△3535	
390	804	402	0,20	1,5	1,15	30 x 50	ECS2WBW331M◇◇△△3050	
	804	402	0,20	1,5	1,26	35 x 40	ECS2WBW331M◇◇△△3540	
470	681	340	0,20	1,5	1,31	35 x 45	ECS2WBW391M◇◇△△3545	
	565	282	0,20	1,5	1,50	35 x 50	ECS2WBW471M◇◇△△3550	
560	474	237	0,20	1,5	1,70	35 x 55	ECS2WBW561M◇◇△△3555	
680	391	196	0,20	1,5	2,00	35 x 60	ECS2WBW681M◇◇△△3560	
	391	196	0,20	1,5	2,00	40 x 50	ECS2WBW681M◇◇△△4050	
820	324	162	0,20	1,5	2,20	35 x 65	ECS2WBW821M◇◇△△3565	
	324	162	0,20	1,5	2,30	40 x 60	ECS2WBW821M◇◇△△4060	
1 000	265	139	0,20	1,5	2,60	35 x 70	ECS2WBW102M◇◇△△3570	


U _{RDC} (Surge Voltage) Code	C _R Rated Capacitance	ESR _{max} Equivalent Series Resistance 20°C 120Hz	ESR _{typ} Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I _{leak} Leakage Current	I _{RAC} Rated Ripple Current 105°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 6
(V)	(μF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
500 (550) 2H	39	6 802	3 401	0,20	0,2	0,35	22 x 25	ECS2HBW390M◇◇△△2225
		5 644	2 822	0,20	0,2	0,41	22 x 30	ECS2HBW470M◇◇△△2230
	47	4 739	2 370	0,20	0,3	0,47	22 x 35	ECS2HBW560M◇◇△△2235
		3 901	1 951	0,20	0,3	0,54	22 x 40	ECS2HBW680M◇◇△△2240
	68	3 237	1 618	0,20	0,4	0,62	25 x 30	ECS2HBW820M◇◇△△2250
		2 653	1 327	0,20	0,5	0,67	25 x 35	ECS2HBW101M◇◇△△2535
	100	2 211	1 106	0,20	0,6	0,77	25 x 40	ECS2HBW121M◇◇△△2540
		2 211	1 106	0,20	0,6	0,72	30 x 30	ECS2HBW121M◇◇△△3030
	120	1 769	885	0,20	0,8	0,85	30 x 40	ECS2HBW151M◇◇△△3040
		1 474	737	0,20	0,9	1,01	30 x 45	ECS2HBW181M◇◇△△3045
	150	1 474	737	0,20	0,9	1,01	35 x 35	ECS2HBW181M◇◇△△3535
		1 206	603	0,20	1,1	1,12	35 x 35	ECS2HBW221M◇◇△△3535
	180	983	472	0,20	1,4	1,29	35 x 40	ECS2HBW271M◇◇△△3540
		804	402	0,20	1,5	1,40	35 x 45	ECS2HBW331M◇◇△△3545
	220	390	681	0,20	1,5	1,60	35 x 50	ECS2HBW391M◇◇△△3550
		470	565	0,20	1,5	1,80	35 x 60	ECS2HBW471M◇◇△△3560
270	560							

ORDER CODE SNAP-IN TYPE

EC	S	2G	QC	221	M	T6	P2	2535	-	JExxxxx								
Techno- logy	Terminal Type		Series Code		Capacitance Code		Capacitance Tolerance		Terminal Style		Terminal / Pitch		Dimension (mm)		Material Code		for Specials only	
EC Electrolytic Capacitor	Snap-In	S	6,3V	0J	CD 293	BZ	0,1	OR1	±20%	M	4,0mm Pin Length	T/L4	2 Pin	P2	22x40	2240	Standard	-
		10V	1A	CD 294	BW	0,47	R47	±10%	K	6,3mm Pin Length	T/L6	3 Pin	P3	30x45	3045	PVC	V	
		16V	1C	CD 295	BC	1,0	010	+30/-10%	Q	Soldering Pin	S4	4 Pin	P4	35x80	3580	PET	E	
		20V	1D	CD 295S	BS	2,2	2R2	+20/-0%	R	on request: alternative pin types ■ = preferred	5 Pin	P5	45x100	45100				
		25V	1E	CD 296	KC	100	101	±15%	L		6 Pin	P6	50x105	50105				
		35V	1V	CD 296L	FL	1 000	102	+20/-10%	V									
		40V	1G	CD 297	BB	10 000	103											
		50V	1H	CD 299	PG													
		63V	1J	CD 29C	QC													
		80V	1K	CD 29D	HR													
		100V	2A	CD 29H	QH													
		125V	2B	CD 29HD	QF													
		160V	2C	CD 29L	QL													
		180V	2K	CD 29U	CU													
		200V	2D	CD 29UH	UT													
		250V	2E	CD 840	ZQ													
		315V	2F	CD 891	ZJ													
		350V	2V	CD 892	ZL													
		385V	2J	CD 895	ZK													
		400V	2G															
		415V	2P															
		420V	2X															
		450V	2W															
		500V	2H															
550V	2Y																	
575V	2Z																	
600V	2S																	
630V	J2																	



2 PIN TYPE: T6P2 / T4P2 STANDARD

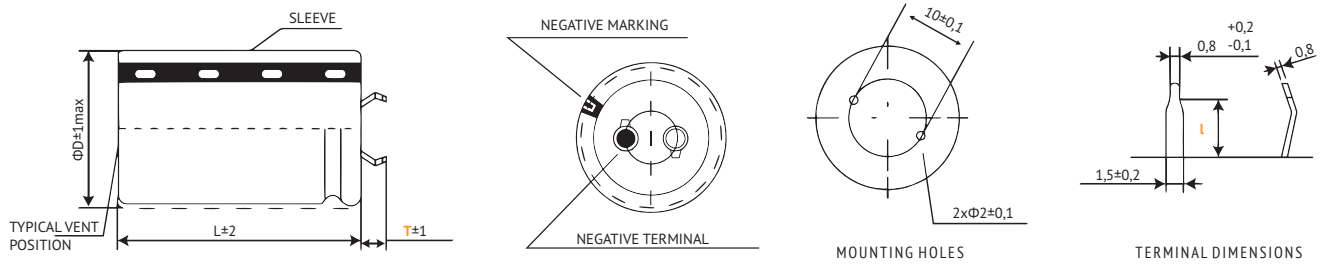


Standard Version: Self-Lock Terminal. Other terminal types and styles on request.
For diameter $\phi D \geq 45\text{mm}$ the safety vent is typically placed at the side of the housing.

Terminal	T6 (preferred)	T4
Pin Length T	6,3 mm	4,0 mm
Pin Detail l	3,5 mm	2,5 mm

! Max. Current Snap-In Terminal: 15A
For more current please ask for Lug-Terminals.

in mm

3 PIN TYPE: T4P3

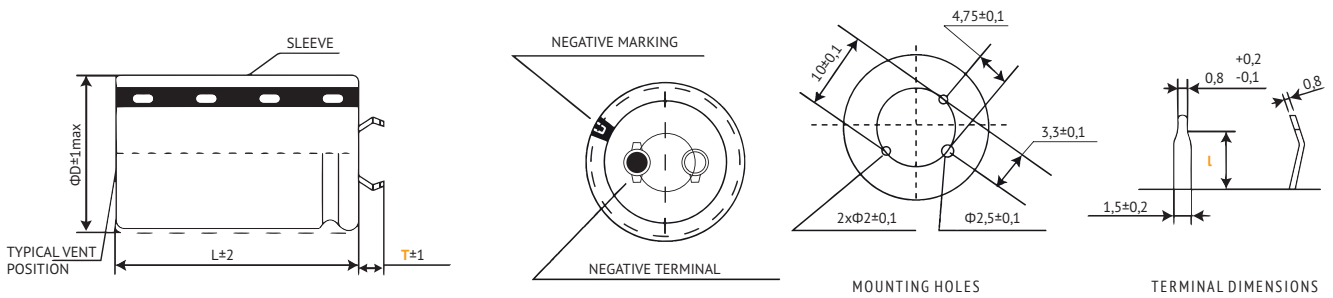


For diameter $\phi D \geq 45\text{mm}$ the safety vent is typically placed at the side of the housing.

Terminal	T6	T4
Pin Length T	-	4,0 mm
Pin Detail l	-	2,5 mm

! Max. Current Snap-In Terminal: 15A
For more current please ask for Lug-Terminals.

in mm

4 PIN TYPE: T6P4/T4P4 STANDARD

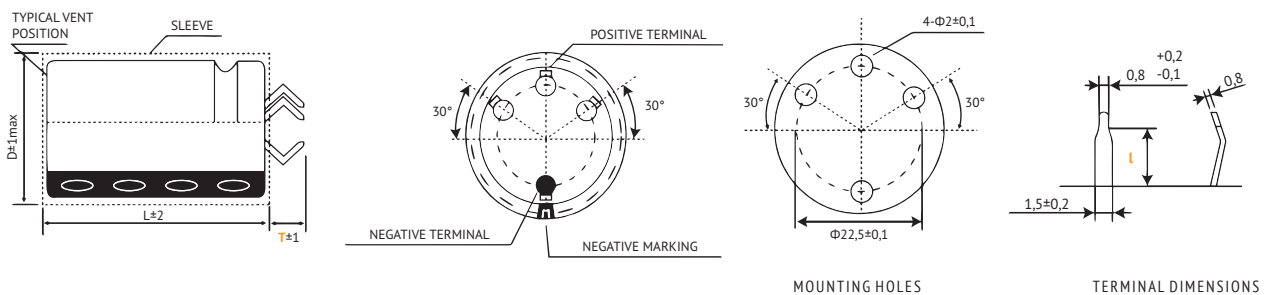

Standard Version: Non-Lock-Terminal. Other terminal types and styles on request.
For $\phi D \geq 30\text{mm}$ only.
For diameter $\phi D \geq 45\text{mm}$ the safety vent is typically placed at the side of the housing.


Terminal	T6 (preferred)	T4
Pin Length T	6,3 mm	4,0 mm
Pin Detail l	3,5 mm	2,5 mm

! Max. Current Snap-In Terminal: 15A
For more current please ask for Lug-Terminals.

in mm



4 PIN TYPE: L6P4/L4P4 SELF-LOCK TERMINAL

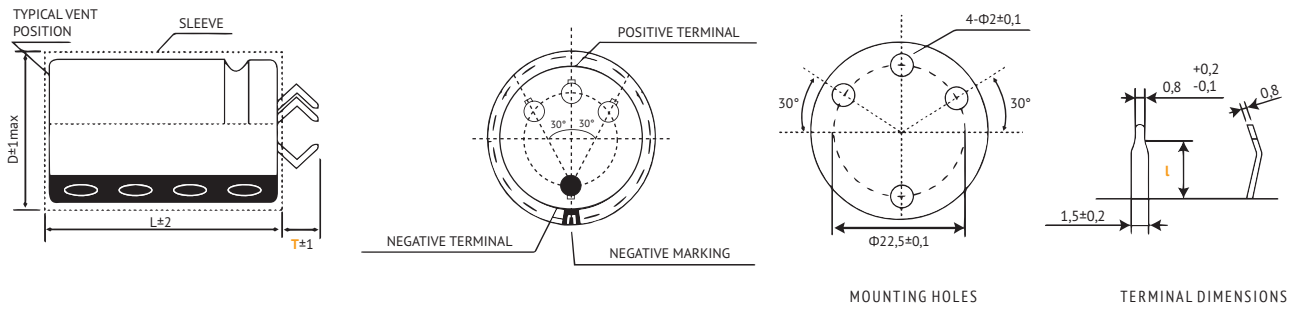


For $\varnothing D \geq 30\text{mm}$ only. Other terminal types and styles on request.
For diameter $\varnothing D \geq 45\text{mm}$ the safety vent is typically placed at the side of the housing.

Terminal	T6 (preferred)	T4
Pin Length T	6,3 mm	4,0 mm
Pin Detail l	3,5 mm	2,5 mm

⚠ Max. Current Snap-In Terminal: 15A
For more current please ask for Lug-Terminals.

in mm

5 PIN TYPE: S4P5 SOLDERING PIN

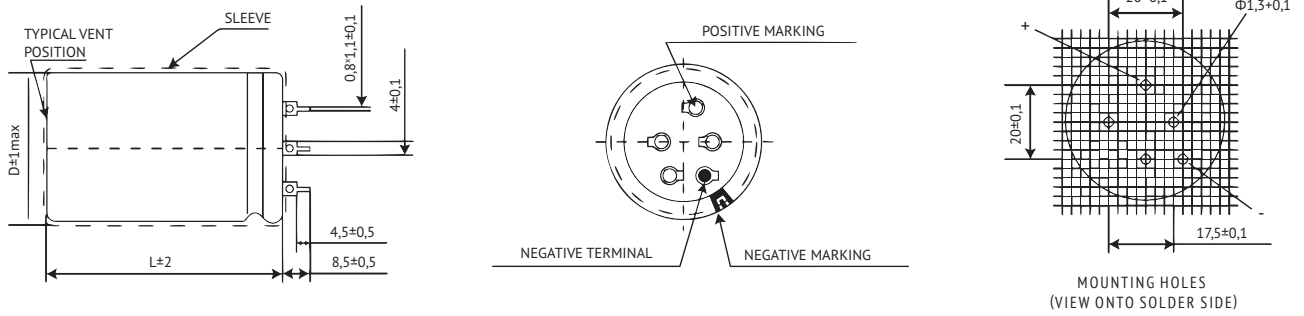


For $\varnothing D \geq 30\text{mm}$ only.
For diameter $\varnothing D \geq 45\text{mm}$ the safety vent is typically placed at the side of the housing.

⚠ Max. Current Snap-In Terminal: 15A
For more current please ask for Lug-Terminals.

in mm

EXAMPLE: AXIAL MOUNTING

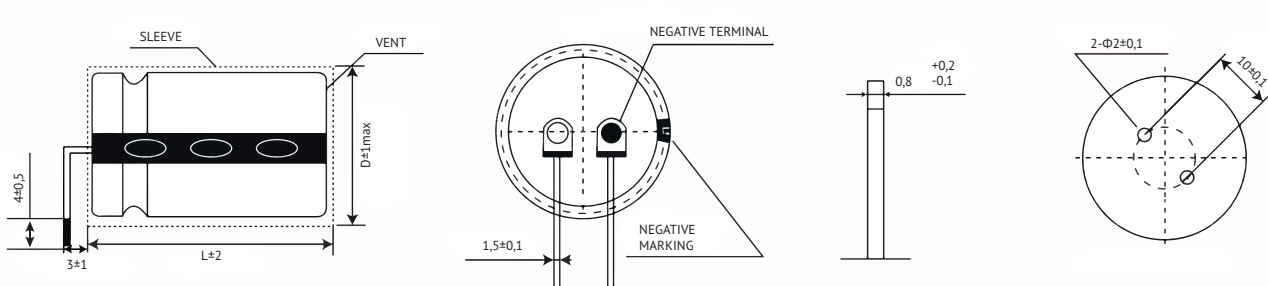


For $\varnothing D \geq 25\text{mm}$ only.
Available also for high vibration usage.

⚠ Max. Current Snap-In Terminal: 15A
For more current please ask for Lug-Terminals.


in mm

Other Terminal Styles on request.

**SNAP-IN
85°C**

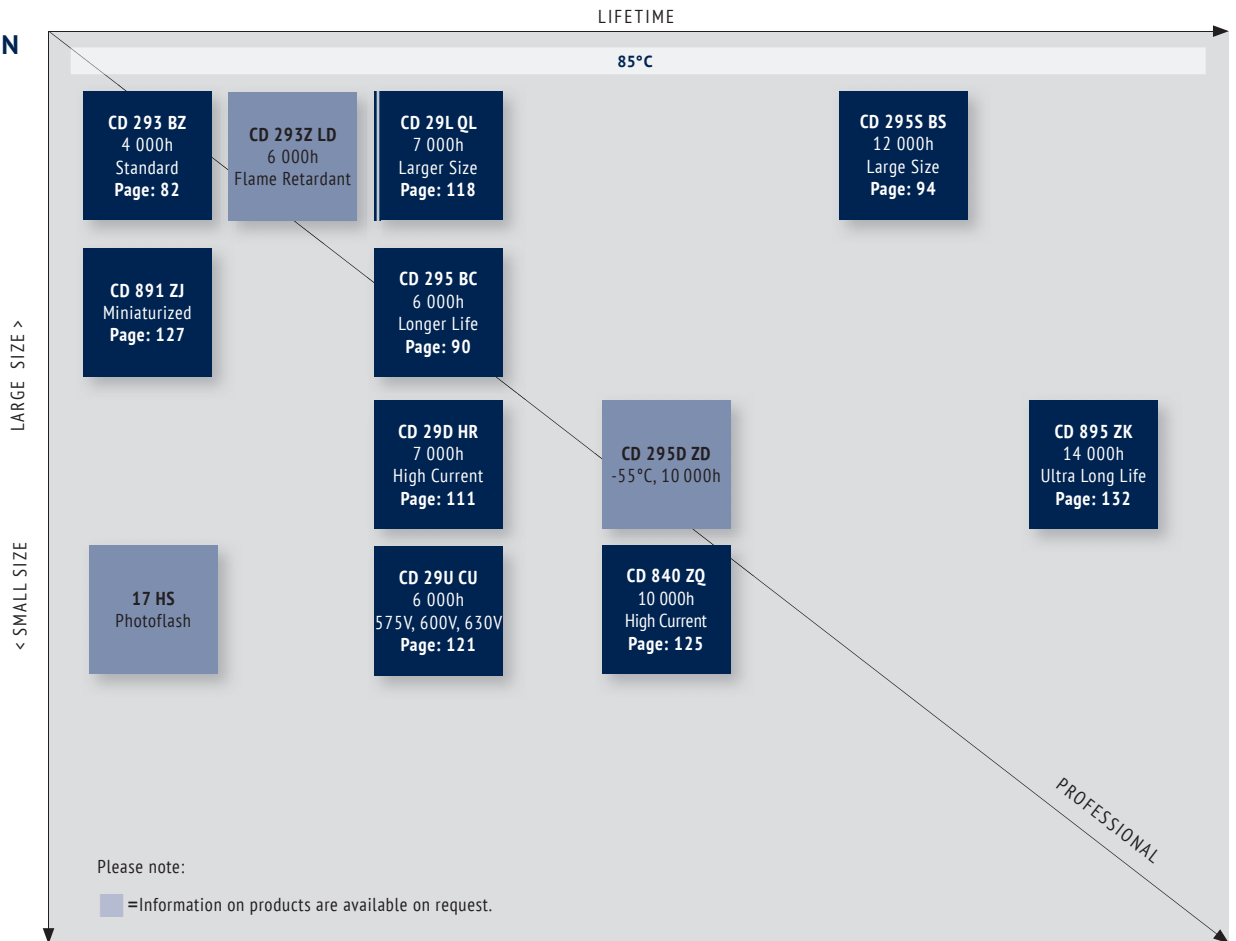

**SNAP-IN
105°C/
125°C**

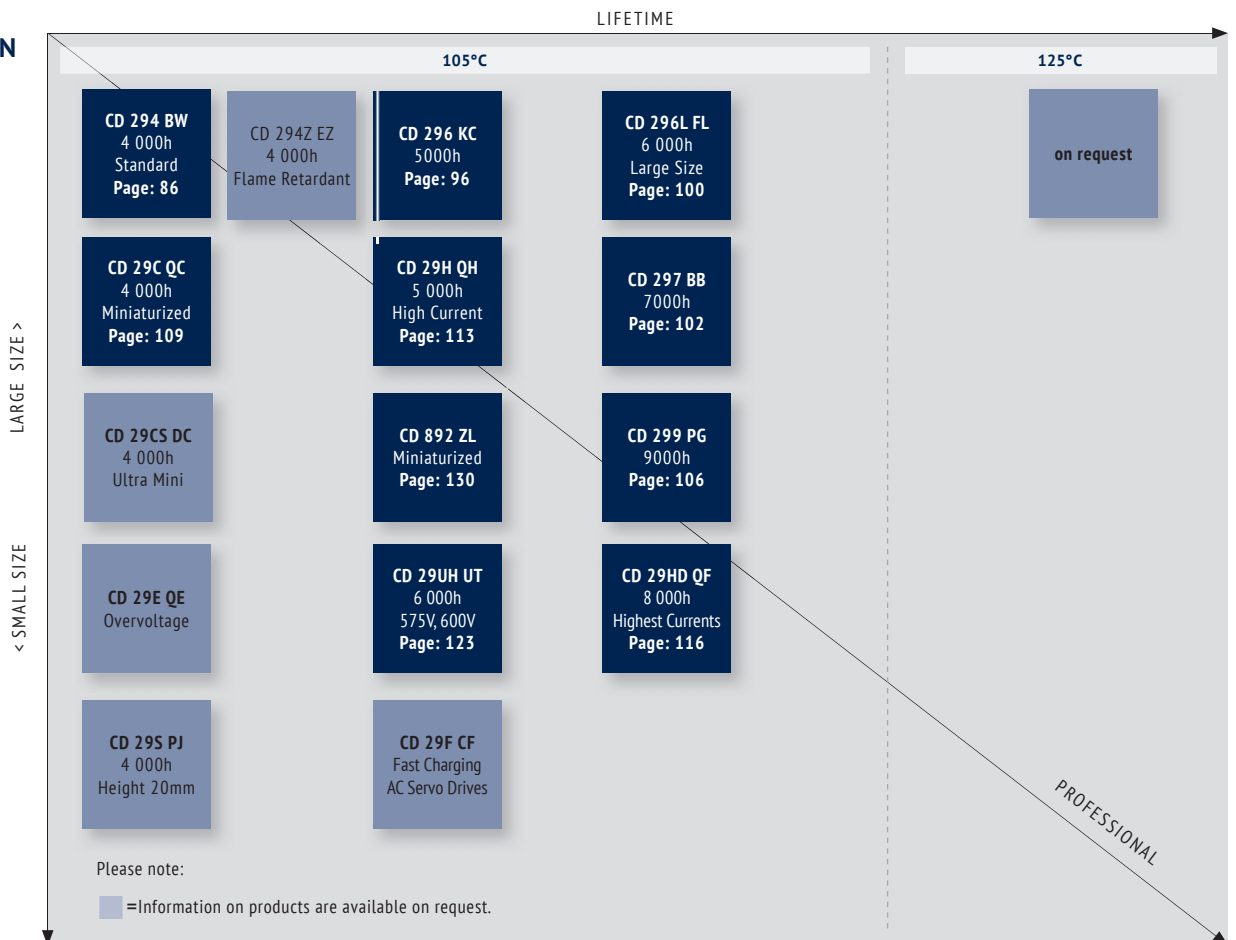

LIFETIME ESTIMATION OF ALUMINUM ELECTROLYTIC CAPACITORS FROM JIANGHAI

To estimate the Lifetime of a non-solid Aluminum Electrolytic Capacitor from Jianghai, the following formulas can be utilized. The Lifetime depends mainly on the ambient temperature, the ripple current and, within certain limits, the operating voltage applied. Other parameters may also affect the Lifetime. Moreover, L_0 can be interpreted in many different ways, which has a fundamental influence on the numerical result. Jianghai offers a high transparency by publishing the different typical definitions of Lifetimes in each datasheet. Lifetime estimations are approximations by nature. Please let JIANGHAI EUROPE confirm any result before using it. The formulas given here do not constitute part of a contract nor of a specification. The formulas do not cover additional aging effects of certain electrolytic systems or other chemical effects. Also the dimensions of the components may have an effect. Forced cooling or other additional cooling-methods have a strong impact on the Lifetime and are not covered by the formulas as defined. For the estimation and interpretation of Lifetime, a close collaboration with JIANGHAI EUROPE is strongly advised.

STRUCTURAL FORMULA

$$L = L_0 \cdot K_T \cdot K_R \cdot K_V$$

WHERE:

- L Total Lifetime
- L_0 Lifetime under Nominal Load at Upper Category Temperature (see catalogue)
- K_T Temperature Factor
- K_R Ripple Current Factor
- K_V Voltage Factor

K_T TEMPERATURE FACTOR

Aluminum Electrolytic Capacitors follow roughly the 10 K rule of Arrhenius. It is possible to estimate the Lifetime by rule of thumb: When the operational temperature is reduced by 10 K, the Lifetime will double. The formula for K_T in detail is:

$$K_T = 2^{\frac{T_0 - T_A}{10K}}$$

WHERE:

- T_0 Rated Temperature
- T_A Ambient Temperature

K_R RIPPLE CURRENT FACTOR

To estimate the influence of ripple current on lifetime, Jianghai uses a safety factor K_i . Under certain conditions this value can be set to $K_i=2$, which is prolonging the lifetime. Please contact Jianghai Europe for details and approval.

$$K_R = K_i^A \frac{\Delta T_0}{10K}$$

WITH:

$$A = 1 - \left(\frac{I_A}{I_R} \right)^2$$

WHERE:

- I_A Actual Rated Ripple Current
- I_R Ripple Current at Upper Category Temperature (databook value)
- ΔT_0 Core Temperature Rise of the capacitor (typically 3,5 ~ 5 K for $T_0 = 105^\circ\text{C}$ and 3,5 ~ 10K for $T_0 = 85^\circ\text{C}$, see databook value)
- K_i Basis, typically defined as

$T_0 = 105^\circ\text{C}$	$I_A > I_R$:	$K_i=4$
	$I_A \leq I_R$:	$K_i=2$
$T_0 = 85^\circ\text{C}$		$K_i=2$



Remark: Safety Factor K_i may be set as $K_i=2$ under certain defined conditions. Please contact Jianghai Europe for approval.

K_V VOLTAGE FACTOR

For Radial Electrolytic Capacitors, this part of the formula has no impact ($K_V = 1$). But for some bigger capacitors like Snap-In and Screw-Terminal types with rated voltages above 160V, the operating voltage will affect their Lifetime. It is expressed as follows:

FOR:

$$0,6 \leq \frac{U_A}{U_R} \leq 1$$

$$K_V = \left(\frac{U_A}{U_R} \right)^{-2,5}$$

WHERE:

- U_A Actual Operating Voltage
- U_R Rated Voltage

FOR:

$$0 < \frac{U_A}{U_R} < 0,6$$

$$K_V = 3,59$$

FOR:

$$\frac{U_A}{U_R} > 1 \text{ not allowed}$$

$$K_V = 1$$

FOR: Radial Capacitors or $U_R \leq 160V$

$$K_V = 1$$

FREQUENCY CORRECTION FACTORS:

If the actual Ripple Currents are not given at the same frequency like I_{σ} , correction factors need to be applied.

$$I_A = \sqrt{\left(\frac{I_{f1}}{F_{f1}}\right)^2 + \left(\frac{I_{f2}}{F_{f2}}\right)^2 + \dots + \left(\frac{I_{fn}}{F_{fn}}\right)^2}$$

JIANGHAI ELECTROLYTIC CAPACITOR LIFETIME

ESTIMATION FORMULA (incl. Safety Factors):

$$L = L_0 \cdot 2^{\frac{T_0 - T_A}{10K}} \cdot K_i \left[1 - \left(\frac{I_A}{I_R}\right)^2 \right]^{\frac{\Delta T_0}{10K}} \cdot \underbrace{\left(\frac{U_A}{U_R}\right)^{-n}}_{K_V}$$

WITH TYPICAL VALUES:

$$T_0 = 105^\circ\text{C} \quad I_A > I_R : K_i = 4$$

$$I_A \leq I_R : K_i = 2$$

$$T_0 = 85^\circ\text{C} \quad K_i = 2$$

$\Delta T_0 =$ depending on the series: 3,5~10K,
see databook value

$$0,6 \leq \frac{U_A}{U_R} \leq 1 \rightarrow n = 2,5$$

$$0 < \frac{U_A}{U_R} < 0,6 \rightarrow K_V = \left(\frac{U_A}{U_R}\right)^{-n} = 3,59$$

For $U_R \leq 160V$, Radial and

$$\frac{U_A}{U_R} > 1 \rightarrow K_V = 1$$

HANDLING PRECAUTIONS FOR ALUMINUM ELECTROLYTIC CAPACITORS FROM JIANGHAI

WARNING

JIANGHAI is not liable for any extent of possible injuries or damages to persons or things, of any kind, caused by the improper application of and/or operating conditions harmful to electrolytic capacitors. Misapplications which may cause failures include, but are not limited to: ripple current or peak current or voltage above specification, operating voltage above surge voltage specified, temperature exposure outside the specified operating temperature range. Examples of harmful operating conditions comprise, but are not limited to: unusual storage or transport temperatures, excessive and/or rapid changes of ambient temperature or humidity, heavy mechanical shock or vibration, corrosive and abrasive particles in the ambient (cooling) air, conducting dust in the ambient (cooling) air, oil or water vapor or corrosive substances, explosive gas or dust, operation under extremely high or low ambient pressure conditions (below or above sea level), superimposed radio frequency voltages, radioactivity. In case of doubt about the impact of operating conditions on capacitor performance, please contact JIANGHAI.

PERSONAL SAFETY

Electrical or mechanical misapplication of electrolytic capacitors may be hazardous. Personal injury or property damage may result from explosion of a capacitor or from the expulsion of electrolyte due to mechanical disruption or the release of a safety vent of a capacitor. In case of injury or skin or eye exposure to electrolyte, immediately seek professional medical advice. Before using electrolytic capacitors in any application, please read these Handling Precautions, familiarizing thoroughly with the information contained herein. Please check before using any of our electrolytic capacitors if these components fulfill the requirements of your application and that warnings and instructions for use are followed.

WARRANTY

The information contained in this catalogue does not form part of any quotation or contract, is believed to be accurate, reliable and up to date. Quality data are based on the statistical evaluations of a large quantity of parts and do not constitute a guarantee in a legal sense. However, agreement on these specifications does mean that the customer may claim for replacement of individual defective capacitors within the terms of delivery. We will not assume any liability beyond the replacement of defective components. This applies in particular to any consequential damage caused by component failure. Furthermore it must be taken into consideration that the figures stated for lifetime, failure rates and outlier percentages refer to the average production status and are therefore to be understood as mean values (statistic expectations) for a large number of delivery lots of identical capacitors. These figures are based on application experience and data obtained from preceding tests under normal conditions, or – for purpose of accelerated aging – more severe conditions. JIANGHAI reserves the right to change these specifications without prior notice. Any application information given is advisory and does not form part of any specification. The products are not primarily designed for use in life support applications, devices or systems where malfunction of these products can reasonably be expected to result in personal injury. JIANGHAI customers using or selling these products for use in such applications without prior written consent of JIANGHAI do so at their own risk and agree fully to indemnify JIANGHAI for any damage resulting from such improper use or sale. This version of the catalogue supersedes all previous versions. Latest versions of datasheets can be found on our homepage: www.jianghai-europe.com. For more details on precautions and guidelines for aluminum electrolytic capacitors, please refer to CENELEC Technical Report CLC/TR 50454:2008 E, "Guide for the application of aluminum electrolytic capacitors".

POLARITY

Electrolytic capacitors are polar and shall never be used with incorrect polarity, as there is a possible danger of shorting or destruction.

RATED VOLTAGE U_R

The rated voltage is marked on the capacitor and defined in the datasheets as U_R . This voltage should never be exceeded and is the maximum peak voltage including any ripple voltages allowed to avoid a shortening of the lifetime or damage of the capacitor. When a ripple current is applied to the capacitor, the sum of the peak ripple voltage and bias DC voltage shall never exceed the rated voltage. It might be necessary to lower the maximum allowed bias DC voltage, when certain ripple currents are applied to the capacitor.

SURGE VOLTAGE

Maximum voltage, which may be applied to the capacitor for short periods of time: max. 1000 cycles of 30 sec. per 6 min., max. 5 pulses per hour. Capacitance drift +/- 15% max.

REVERSE VOLTAGE

Reverse voltages or voltages < 0V are not allowed.

RECOVERY VOLTAGE

Electric potential between the positive and negative terminal may exist as a result of dielectric absorption. Please take action that this load does not damage other devices or scare workers during the production process (sparks possible). If needed please discharge the capacitor through a 1kΩ resistor.

TEMPERATURE RANGE

Use electrolytic capacitors only within the specified operating temperature range.

OVER-CURRENT

Currents exceeding the rated ripple currents should be avoided.

RIPPLE CURRENT/VOLTAGE

The combined value of DC voltage and peak AC voltage (due to ripple current) shall not exceed the rated voltage and shall never be < 0V. Use of aluminum electrolytic capacitors under ripple current with wide amplitudes is equivalent to rapid charge-discharge operation.

RAPID CHARGING/DISCHARGING

Rapid charging/discharging generates severe heat and gas may be emitted which may lead to explosion. Consult JIANGHAI about specially designed capacitors suitable for such kind of applications. Example: Servo Drive Application

BALANCING RESISTORS

Balancing resistors should be utilized if capacitors are used in serial connection. Please choose low-tolerance resistors to limit voltage drift.

CHARGE-DISCHARGE PROOF

JIANGHAI capacitors are charge-discharge proof, which means that 10⁶ switching cycles will cause capacitance reduction of less than 10%.

LIFETIME

There are many different lifetime definitions known without any true standard definition. Take special care when capacitors are compared that the capacitors fulfill the needed requirements. JIANGHAI publishes all conditions to be as transparent as possible. In the case of lifetime tests with additional ripple currents, the bias DC voltage must be reduced, so that the sum of bias DC voltage and the peak of the ripple voltage does not exceed the Rated Voltage U_R .

Load life: Period of time, during which the technical parameters of all capacitors stay within the given limits. JIANGHAI defines this without allowing for outliers.

Useful life: Defined like load life, but with a larger range of parameter change.

Endurance test: IEC 60384-4 defines the acceptable drift criteria of electrical parameters after the endurance tests (continuous voltage test).

Shelf Life: Definition of time with acceptable drift of capacitor parameters after storage at upper category temperature without load.

VIBRATION AND MECHANICAL STRESS

Capacitors are sensitive to vibration and mechanical forces applied on the leads. Do not use capacitors, which have been dropped onto a rigid surface.

INSULATION

If any defect of the sleeve is visible, the component should not be used – the same holds for any kind of visible damage. A capacitor should be electrically isolated from the following parts: aluminum case, cathode lead wire, anode lead wire and circuit pattern, and auxiliary terminal of snap-in type. The sleeve is not recognized as an isolator and therefore the standard capacitor should not be used in a place where insulation function is needed. Please contact JIANGHAI if a higher grade of insulation is required.

ENVIRONMENTAL CONDITIONS

Avoid direct contact with water, salt solution, oil, dewing conditions. Halogens generally, especially fumigation treatment with bromides and flame retardant agents containing halogens must be avoided. Avoid exposing to direct sunshine, ozone, ultraviolet rays and x-ray radiation. Air Pressure: Max. 150kPa, min. 8kPa. For usage >2000m altitude above sea level current deratings might be necessary. No heavy air pressure changes are allowed. Do not use or store in an environment containing any hazardous gas (e.g., hydrogen sulphide, sulphurous acid, nitrous acid, chlorine, ammonia, bromine, methyl bromide, other halogens) or acidic or alkaline solutions.

STORAGE

Temperature 5 to 35°C, relative humidity below 75%. Electrolytic capacitors may accumulate charge naturally during storage. In this case discharge through a 1kOhm resistor before use (Recovery voltage). Leakage current may be increased after long storage time. In this case the capacitor should be subjected to the rated voltage treatment through a 1kOhm resistor before use for 1 hour, then it should be discharged through a resistor of about 1 Ohm/Volt. Storage times above 1 year should be avoided or rated voltage treatment may be necessary. In accordance to IEC 60384-4 electrolytic capacitors are subject to a reforming process before acceptance testing. Rated voltage is applied via a series resistance (100Ω: $U_R \leq 100VDC$, 1kΩ: $U_R > 100VDC$).

SOLDERING

Soldering conditions (temperature, times) should be within specified conditions, especially for SMD components. Avoid high soldering temperatures as this may reduce lifetime or damage the capacitor. Do never dip the capacitor body into molten solder. Flux should not be adhered to the capacitor's body but only to its terminals. For details and different methods please contact us.

GLUEING, CLEANING AND COATING

Do not use fixing agents or cleaning substances containing halogens. Do not use coating and moulding components that completely seal the capacitor from the environment. Also, never use solvents containing: halogenated hydrocarbons, alkali, petroleum, trichloroethylene/-ethane, xylene, acetones, trichlorotrifluoroethane, tetrachloroethylene, methylenechloride, chloroform, acetates, ketones, esters, chlorides and bromides.

MOUNTING

Other devices, which are mounted near the capacitor, should not touch the capacitor. Additional heat coming from other components near the capacitor may reduce the lifetime of the capacitor. Do never bend or twist the capacitor after soldering to avoid stress on the leads. Radial capacitors are not protected against mechanical forces on the leads. Forces on the pins might damage the capacitor. No printed circuit board tracks are allowed between the lead pads of the capacitor. Screw Terminal capacitors should only be mounted in an upright position.

TRANSPORT

Avoid fumigation and spraying insecticides (especially with bromides) in the import or export procedures which can cause corrosion. This applies also to the finished devices.

MAINTENANCE

Periodical inspection should be carried out for the capacitor: visual inspection to check pressure relief open or leakage of electrolyte, electrical characteristics as leakage current, capacitance, and dissipation factor.

ELECTROLYTE AND SEPARATOR PAPER

Electrolyte and separator paper used in aluminum capacitors may be flammable. Also, electrolyte is electrically conductive. Therefore, in case electrolyte gets in contact with PC board it may cause corrosion of circuit pattern or cause short circuit between patterns, and may lead to smoke generation or ignition in worst case.

CAUTION DURING USE OF CAPACITORS

Do not touch the terminals of capacitors. Keep the capacitor free from conductive solution, such as acids, alkali and so on. Ensure that the operating environment of the equipment into which the capacitor has been built is within the specified conditions mentioned in the catalogue or specification sheets.

SAFETY VENT

The safety vent needs some free space to open properly. Allow for free headroom of at least 2mm for diameter $\leq 16mm$, more than 3mm for diameter 18-35mm, more than 5mm for case diameter 40mm and larger.

EMERGENCY ACTIONS

When the pressure relief vent is open and some gas blows out from the capacitor, please turn the main switch of the equipment off or pull out the plug from the power outlet immediately. During safety vent operation, extremely hot gas (>100°C) may blow out of the capacitors. Do not stand close to the capacitors. In case of eye contact, rinse the open eye(s) with clean water immediately. In case of ingestion, gargle with water immediately, do not swallow. Do not touch electrolyte but wash skin with soap and water in case of skin contact.

DEFINITION OF ELECTRICAL PARAMETERS

Separate documents as application notes, equivalent circuit diagrams and so on are available on request.

PACKAGING

Please refer to the data book for details. Further information is available on request.

DISPOSAL

Scrapped capacitors are classified as scrapped metal. For disposal they are handled as controllable industrial waste because of the nature of the contents (electrolyte). Most of the material is aluminum and cannot be completely burned.

Jianghai Europe Electronic Components GmbH

VERSION 10/2021