


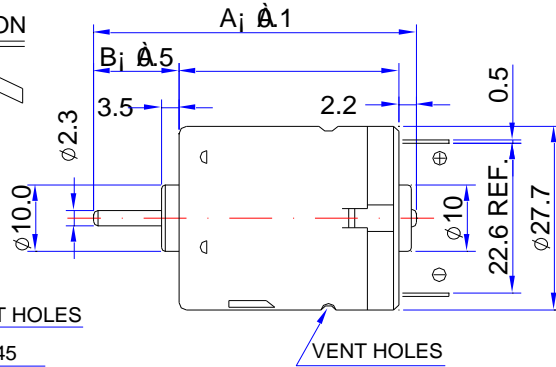




**Typical Application:**

1. Household Appliances:
  - a) Hairdryer
  - b) Massager
2. Precision Instruments:
  - Automatic Vending Machines
3. Automotive Products:
  - Door Lock

DIRECTION OF ROTATION





\* Carbon Brush Motor. \* Plastic Bottom Cap. Weight: 49g (APPROX)

**ELECTRICAL SPECIFICATION CHART:** (The following specifications can be changed as customers' requirement)

Model	Voltage		At No Load		At Max Efficiency					Stall Torque G.CM
	Workable Range	Nominal	Speed	Current	Speed	Current	Torque	Output	Eff.	
			RPM	A	RRPM	A	G.CM	W	%	
RC365S-10250	9.0~24.0	12.0V Constant	3950	0.07	2798	0.18	35.0	1.00	46.3	120
RC365S-12190	6.0~24.0	12.0V Constant	5563	0.09	4280	0.23	30.0	1.32	47.8	130
RC365S-12200	9.0~24.0	12.0V Constant	5050	0.12	3630	0.27	45.0	1.70	52.5	160
RC365S-16120	6.0~24.0	12.0V Constant	9000	0.14	7160	0.50	45.0	3.30	55.0	220
RC365S-1885	6.0~20.0	17.0V Constant	18400	0.26	15200	1.11	70.0	10.93	57.7	405
RC365S-2073	6.0~20.0	17.0V Constant	22000	0.35	18088	1.50	80.0	14.80	58.0	450
RC365S-2554	6.0~18.0	12.0V Constant	20300	0.32	16830	1.68	70.0	12.10	60.0	410
RC365S-3033	3.0~12.0	6.0V Constant	16340	0.54	12340	3.40	100.0	12.65	62.0	408

**CHARACTERISTIC CURVES:**

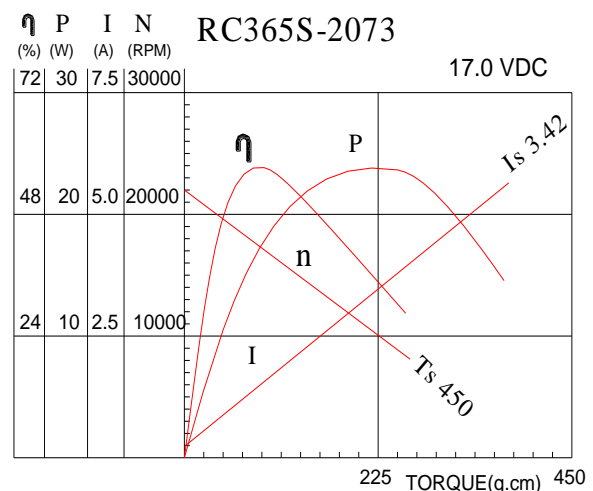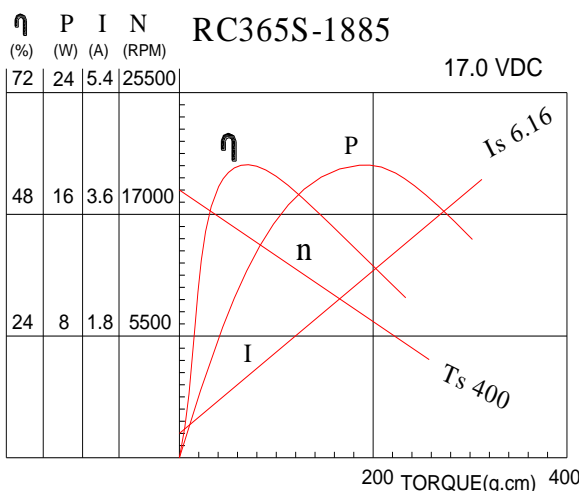

Shenzhen Nostop Electric Co., Ltd

Building C#, Gangzhilong Science & Technology Industrial Park, Qinglong Road, Longhua Town,  
Shenzhen City, Guangdong Province, 518107 P.R.China

TEL: +86.755. 2983 4766, 2815 9775, 2815 9776 FAX: +86.755. 2967 4299

E-mail: [stony@nostop.cn](mailto:stony@nostop.cn)

URL: <http://www.nostopmotor.com>, <http://www.nostop.cn>