
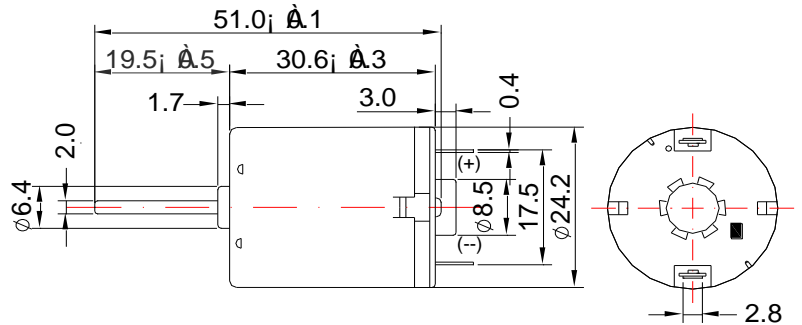


DIRECTION OF ROTATION



Typical Application:



1. Toys and Models
2. Radio Control Models
3. Automotive Products
4. Aircon Flap

* Precision Metal Brush Motor. * Sheet Metal Brush Motor Weight: 51g (APPROX)

ELECTRICAL SPECIFICATION CHART: (The following specifications can be changed as customers' requirement)

Model	Voltage		At No Load		At Max Efficiency				Stall	
	Workable Range	Nominal	Speed	Current	Speed	Current	Torque	Output	Torque	Current
			RPM	A	RRPM	A	G.CM	W	G.CM	mA
RC370S-10500	6.0~24.0	12.0V Constant	4000	0.01	2800	0.10	18.0	0.58	47.0	80
RC370S-10660	6.0~24.0	13.0V Constant	2720	0.04	2283	0.06	19.8	0.46	59.0	128
RC370S-10804	3.6~24.0	8.0V Constant	2600	0.03	2270	0.06	15.0	0.35	72.9	120
RC370S-11660	3.6~24.0	11.0V Constant	2400	0.04	1689	0.09	21.4	0.37	37.4	102
RC370S-12350	6.0~24.0	12.0V Constant	6500	0.04	5485	0.09	14.3	0.81	75.0	120
RC370S-12400	3.6~24.0	8.0V Constant	2700	0.03	2340	0.07	19.0	0.44	78.6	140
RC370S-22170	3.6~24.0	6.0V Constant	6060	0.06	5370	0.31	24.0	1.32	70.9	210
		8.0V Constant	7650	0.08	6760	0.38	25.5	1.77	58.2	220

CHARACTERISTIC CURVES:

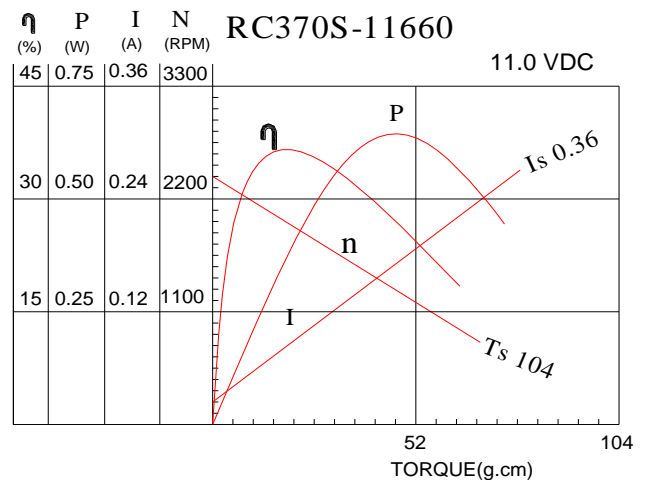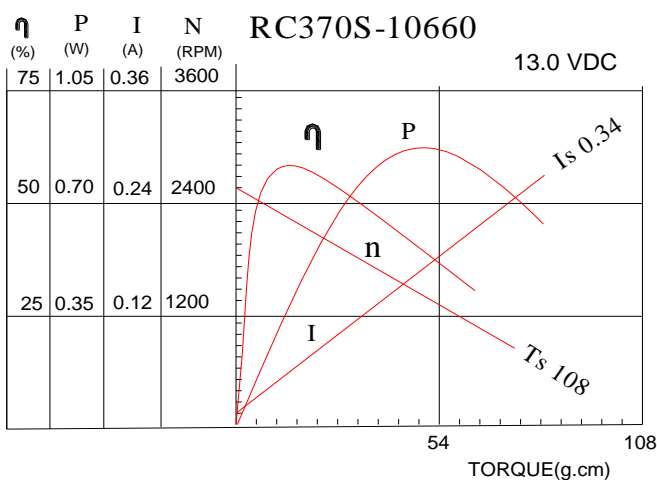

Shenzhen Nostop Electric Co., Ltd

Building C#, Gangzhilong Science & Technology Industrial Park, Qinglong Road, Longhua Town,
Shenzhen City, Guangdong Province, 518107 P.R.China

TEL: +86.755. 2983 4766, 2815 9775, 2815 9776 FAX: +86.755. 2967 4299

E-mail: stony@nostop.cn

URL: <http://www.nostopmotor.com>, <http://www.nostop.cn>