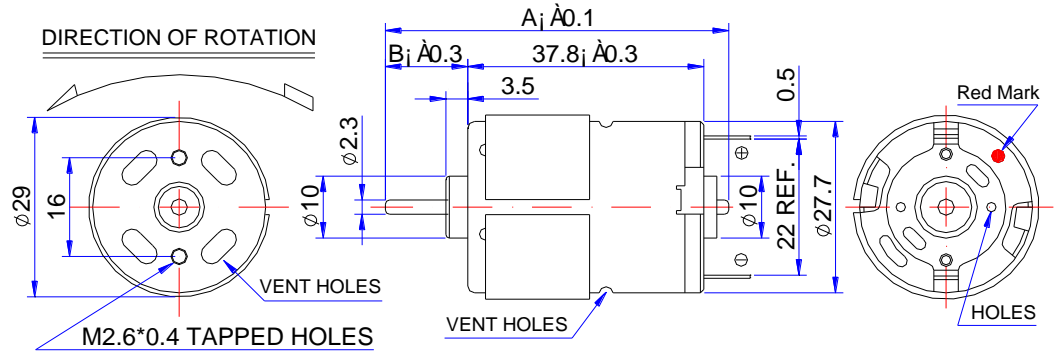



**Typical Application:**

1. Pinhole Plotter / Vacuum Cleaner
2. Kitchen Appliances / Car Antenna.
3. Drill & Screw Driver

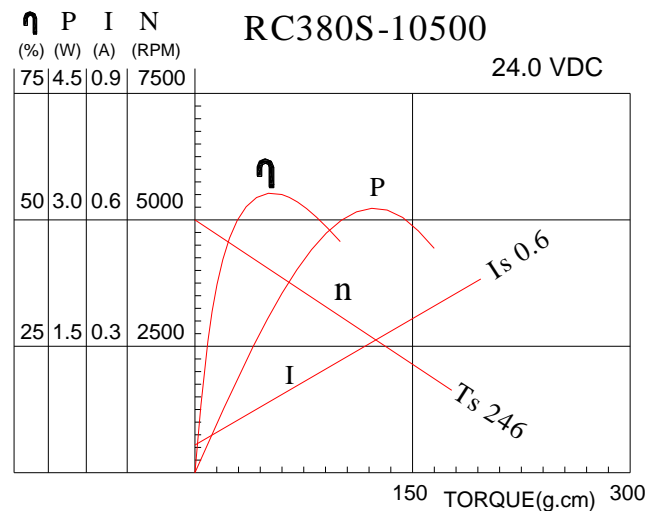
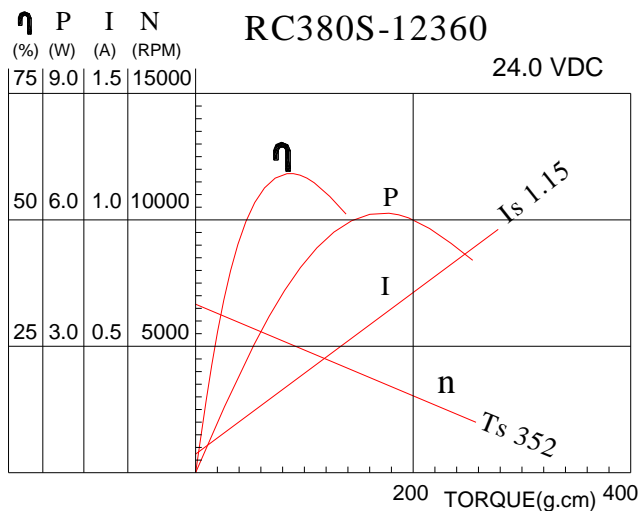


Shaft Length (A): 57.0 62.0 (mm)  
 Shaft Extension (B): 16.4 21.4

\* Carbon Brush Motor. \* Plastic Bottom Cap and metal bottom cap are all available. Weight: 75g (APPROX)

**ELECTRICAL SPECIFICATION CHART: (The following specifications can be changed as customers' requirement)**

Model	Voltage		At No Load		At Max Efficiency					Stall Torque
	Workable Range	Nominal	Speed	Current	Speed	Current	Torque	Output	Eff.	
			RPM	A	RRPM	A	G.CM	W	%	
RC380S-10500	16~30V	24.0V Constant	5000	0.04	4030	0.15	47.8	1.97	56.9	246
RC380S-12360	12~30V	24.0V Constant	8900	0.06	5670	0.25	63.0	3.66	60.8	352
RC380S-20150	6~24V	12.0V Constant	8200	0.15	6760	0.70	74.0	5.13	61.3	422
RC380S-23140	6~24V	12.0V Constant	8500	0.13	7240	0.75	83.0	6.16	69.0	560
RC380S-3270	6~24V	6.0V Constant	8810	0.33	7400	1.73	86.0	6.50	62.6	542
RC380SP-1044	15~30V	27.0V Constant	6000	0.05	4740	0.20	59.0	2.86	52.0	280
RC380SP-2611	6~24V	12.0V Constant	10200	0.19	8770	1.15	100.0	9.00	64.7	713
RC380SP-4045	3~9V	7.20V Constant	16800	0.57	14470	3.50	108.0	16.00	63.0	780

**CHARACTERISTIC CURVES:**


Nostop Electric Co., Ltd

A2-101#, Mei Li 365 Hua Yuan, Longhua, Shenzhen, Guangdong 518109, China

TEL: +86.755.2806 7771

FAX: +86.755.2806 7785

 E-mail: [mail@nostopmotor.com](mailto:mail@nostopmotor.com)

 URL : <http://www.nostopmotor.com>