


**Typical Application:**

1. Kitchen Appliance
2. Blood Pressure Meter
3. Air Conditioning Damper Actuator
4. Audio and Visual Equipments: VCR, CD Player.


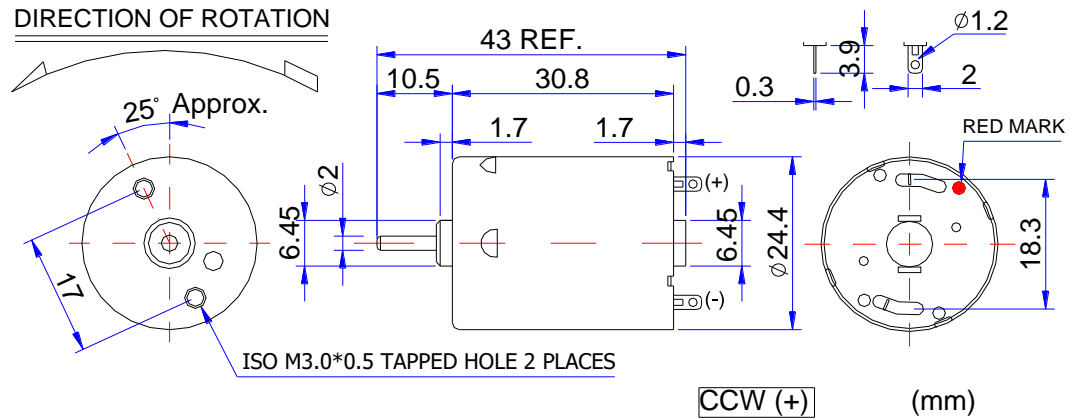


\* Precision Metal Brush Motor. \* Metal Bottom Cap. Weight: 51g (APPROX)

**ELECTRICAL SPECIFICATION CHART:** (The following specifications can be changed as customers' requirement)

Model	Voltage		At No Load		At Max Efficiency				Stall	
	Workable Range	Nominal	Speed	Current	Speed	Current	Torque	Output	Torque	Current
			RPM	A	RRPM	A	G.CM	W	G.CM	A
RF370CA-15370	3.0~12.0	12.0V Constant	5600	0.026	4840	0.17	25.3	1.25	187	1.06
RF370CA-12560	4.0~12.0	12.0V Constant	3700	0.018	3090	0.091	20.7	0.66	125	0.46
RF370CB-11670	7.0~16.0	12.0V Constant	3100	0.011	2620	0.059	16.6	0.45	106	0.32

**CHARACTERISTIC CURVES:**

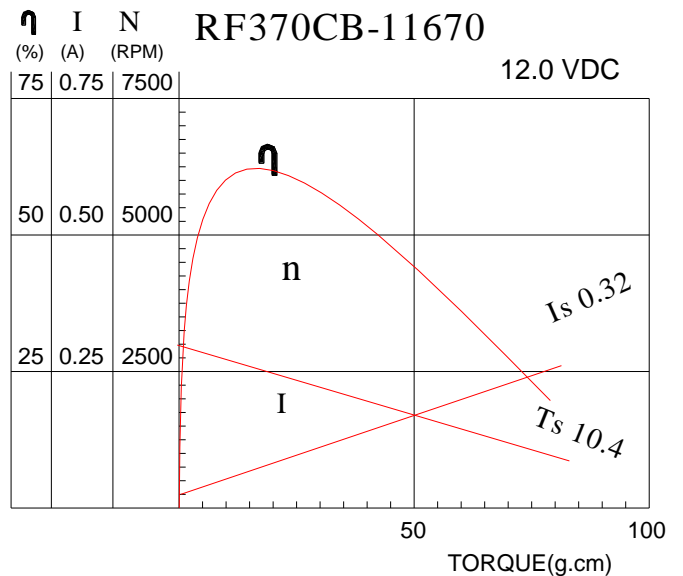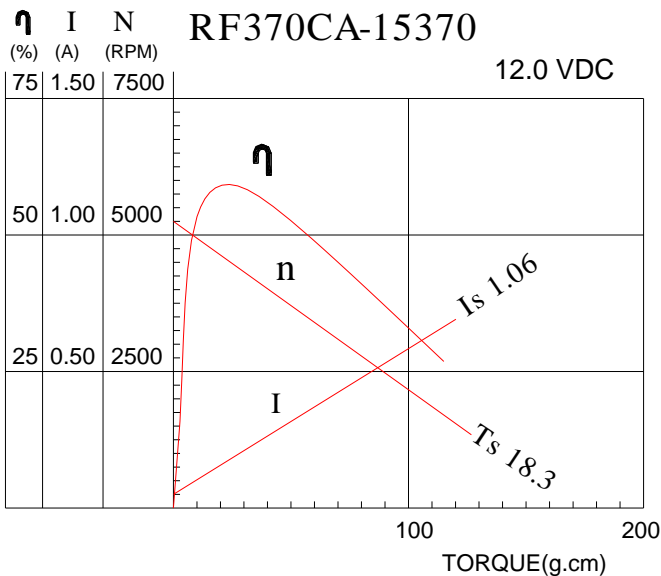

Shenzhen Nostop Electric Co., Ltd

Building C#, Gangzhilong Science & Technology Industrial Park, Qinglong Road, Longhua Town,  
Shenzhen City, Guangdong Province, 518107 P.R.China

TEL: +86.755. 2983 4766, 2815 9775, 2815 9776 FAX: +86.755. 2967 4299

E-mail: [stony@nostop.cn](mailto:stony@nostop.cn)

URL: <http://www.nostopmotor.com>, <http://www.nostop.cn>