
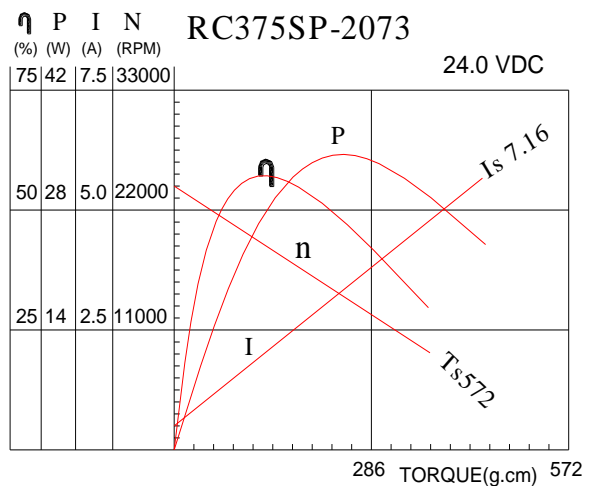


* Carbon Brush Motor. * Plastic Bottom Cap. Weight: 59g (APPROX)

ELECTRICAL SPECIFICATION CHART: (The following specifications can be changed as customers' requirement)

Model	Voltage		At No Load		At Max Efficiency					Stall Torque G.CM
	Workable Range	Nominal	Speed RPM	Current A	Speed RRPM	Current A	Torque G.CM	Output W	Eff. %	
RC375SP-1885	12~24V	12.0V Constant	11300	0.18	8980	0.70	50.7	4.62	55.0	245
		24.0V Constant	21800	0.20	18130	1.00	80.4	14.90	63.0	478
RC375SP-2073	12~24V	12.0V Constant	12900	0.18	10510	0.79	53.4	5.70	60.5	288
		24.0V Constant	25600	0.33	21067	1.35	90.0	19.40	59.9	572
RC375SP-2168	12~24V	20.0V Constant	23450	0.30	20010	1.33	88.0	18.00	67.7	600
RC375SP-2742	12~18V	12.0V Constant	21500	0.38	17916	1.98	80.0	14.70	61.9	480

CHARACTERISTIC CURVES:

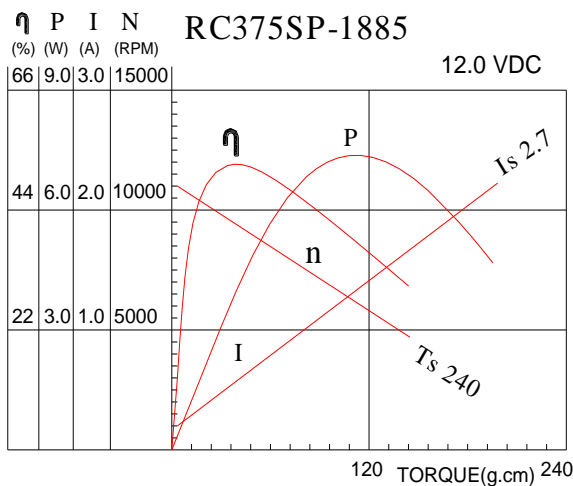

Shenzhen Nostop Electric Co., Ltd

Building C#, Gangzhilong Science & Technology Industrial Park, Qinglong Road, Longhua Town,

Shenzhen City, Guangdong Province, 518107 P.R.China

TEL: +86.755. 2983 4766, 2815 9775, 2815 9776 FAX: +86.755. 2967 4299

E-mail: stony@nostop.cn

URL: <http://www.nostopmotor.com>, <http://www.nostop.cn>