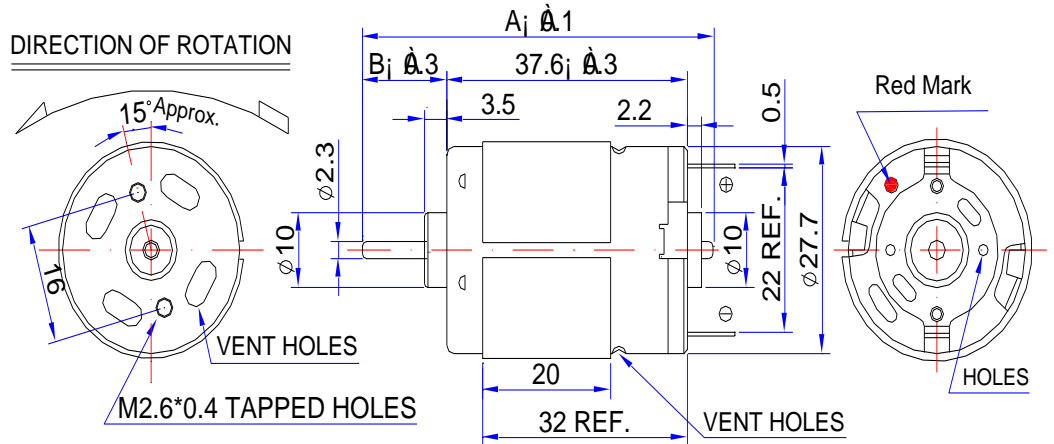


Typical Application:

- Precision Instruments:
Automatic Vending Machine
- Household Appliances: Tooth Brushes/ Hair dryer
- Electronic Typewriter

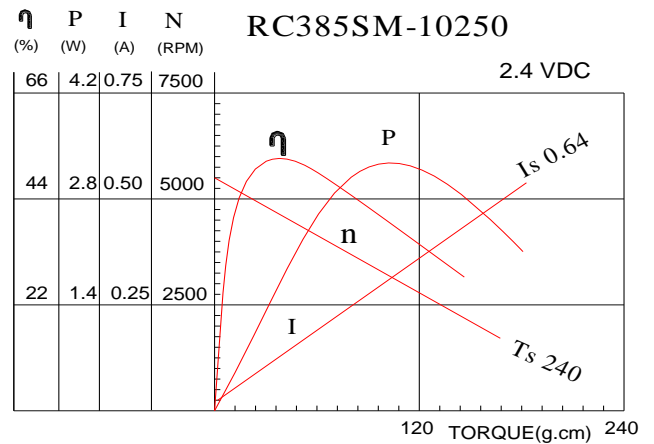
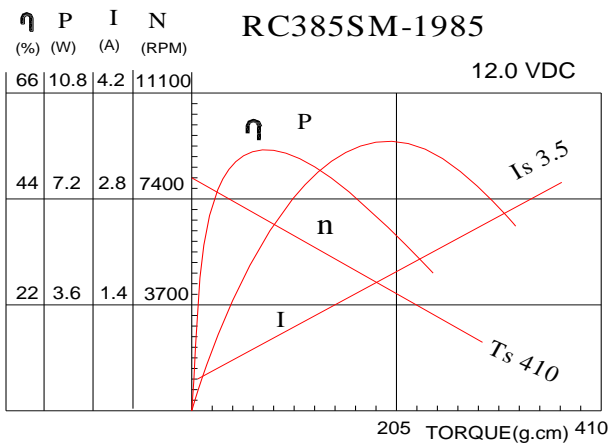


Shaft Length (A): 57.0 62.0 (mm)
 Shaft Extension (B): 16.4 21.4

* Carbon Brush Motor. * Plastic Bottom Cap and metal bottom cap are all available. Weight: 80g (APPROX)

ELECTRICAL SPECIFICATION CHART: (The following specifications can be changed as customers' requirement)

Model	Voltage		At No Load		At Max Efficiency					Stall Torque
	Workable Range	Nominal	Speed	Current	Speed	Current	Torque	Output	Eff.	
			RPM	A	RRPM	A	G.CM	W	%	G.CM
RC385SM-10250	12~30	24.0V Constant	5406	0.06	4325	0.16	48.0	2.13	55.5	240
RC385SM-16120	12~30	24.0V Constant	12000	0.11	9900	0.54	80.0	8.12	62.7	480
RC385SM-1985	12~18	12.0V Constant	8410	0.23	6933	0.76	72.0	5.12	56.1	410
RC385SM-2270	6~24.0	12.0V Constant	9800	0.15	8200	0.75	70.0	5.89	65.4	445
		20.0V Constant	16400	0.18	1400	1.04	95.0	13.64	65.6	670

CHARACTERISTIC CURVES:


Shenzhen Nostop Electric Co., Ltd

Building C#, Gangzhilong Science & Technology Industrial Park, Qinglong Road, Longhua Town,
 Shenzhen City, Guangdong Province, 518107 P.R.China

TEL: +86.755. 2983 4766, 2815 9775, 2815 9776 FAX: +86.755. 2967 4299

E-mail: stony@nostop.cn

URL: <http://www.nostopmotor.com>, <http://www.nostop.cn>