

Typical Application:

1. Hair Dryer / Precision Tools
2. Electronic Printer / Copy Machine.



Shaft Length (A): 57.0 62.0
Shaft Extension (B): 16.4 21.4 (mm)

* Carbon Brush Motor. * Plastic Bottom Cap and metal bottom cap are all available. Weight: 70g (APPROX)

ELECTRICAL SPECIFICATION CHART: (The following specifications can be changed as customers' requirement)

Model	Voltage		At No Load		At Max Efficiency					Stall Torque G.CM
	Workable Range	Nominal	Speed	Current	Speed	Current	Torque	Output	Eff.	
			RPM	A	RRPM	A	G.CM	W	%	
RC385S-10250	12~30	24.0V Constant	5460	0.05	4280	0.16	46.9	2.1	53.0	217
RC385S-16120	12~30	24.0V Constant	11600	0.11	9640	0.54	80.7	8.0	61.8	478
RC385S-1985	12~18	12.0V Constant	8410	0.23	6933	0.76	72.0	5.12	56.1	410
RC385S-1885	12~26	12.0V Constant	9600	0.17	7660	0.67	58.2	4.6	56.8	288
		24.0V Constant	19000	0.19	15800	0.94	89.1	14.2	63.0	524
RC385S-2073	12~26	12.0V Constant	10600	0.19	8600	0.81	64.0	5.6	57.7	339
		24.0V Constant	21900	0.23	18420	1.21	97.8	18.5	63.3	616
RC385S-2270	6~24	12.0V Constant	9900	0.18	8230	0.88	76.0	6.4	60.7	451
		20.0V Constant	16600	0.19	14170	1.11	99.0	14.4	64.0	679

CHARACTERISTIC CURVES:

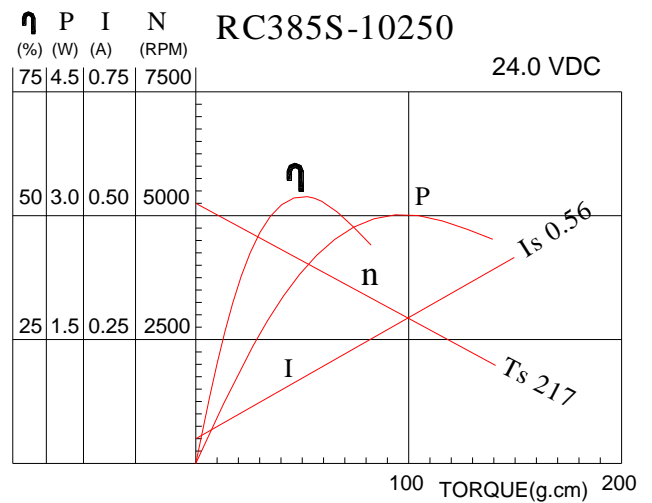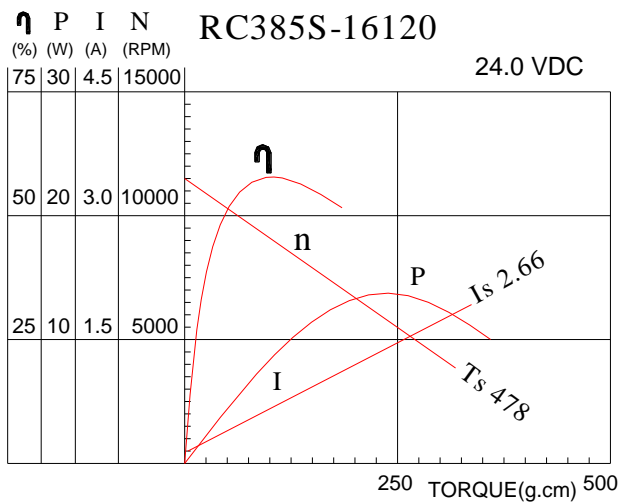

Shenzhen Nostop Electric Co., Ltd

Building C#, Gangzhilong Science & Technology Industrial Park, Qinglong Road, Longhua Town,
Shenzhen City, Guangdong Province, 518107 P.R.China

TEL: +86.755. 2983 4766, 2815 9775, 2815 9776 FAX: +86.755. 2967 4299

E-mail: stony@nostop.cn

URL: <http://www.nostopmotor.com>, <http://www.nostop.cn>